



- For Cerge dektops

Instructions for adding a Kyocera printer to user stations


Press Start button→ Devices and Printers → Add a Printer

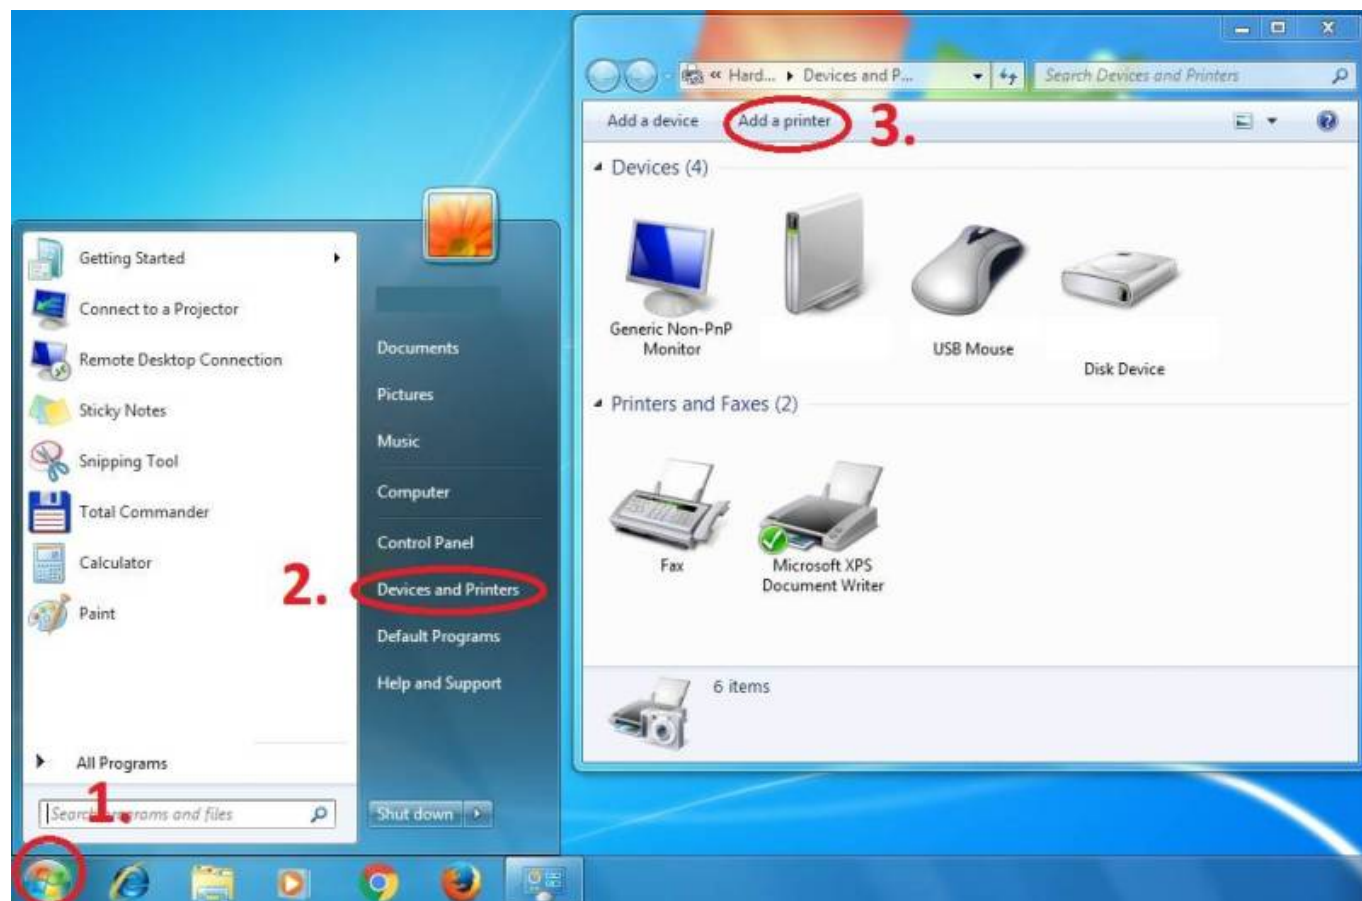

Add a local printer

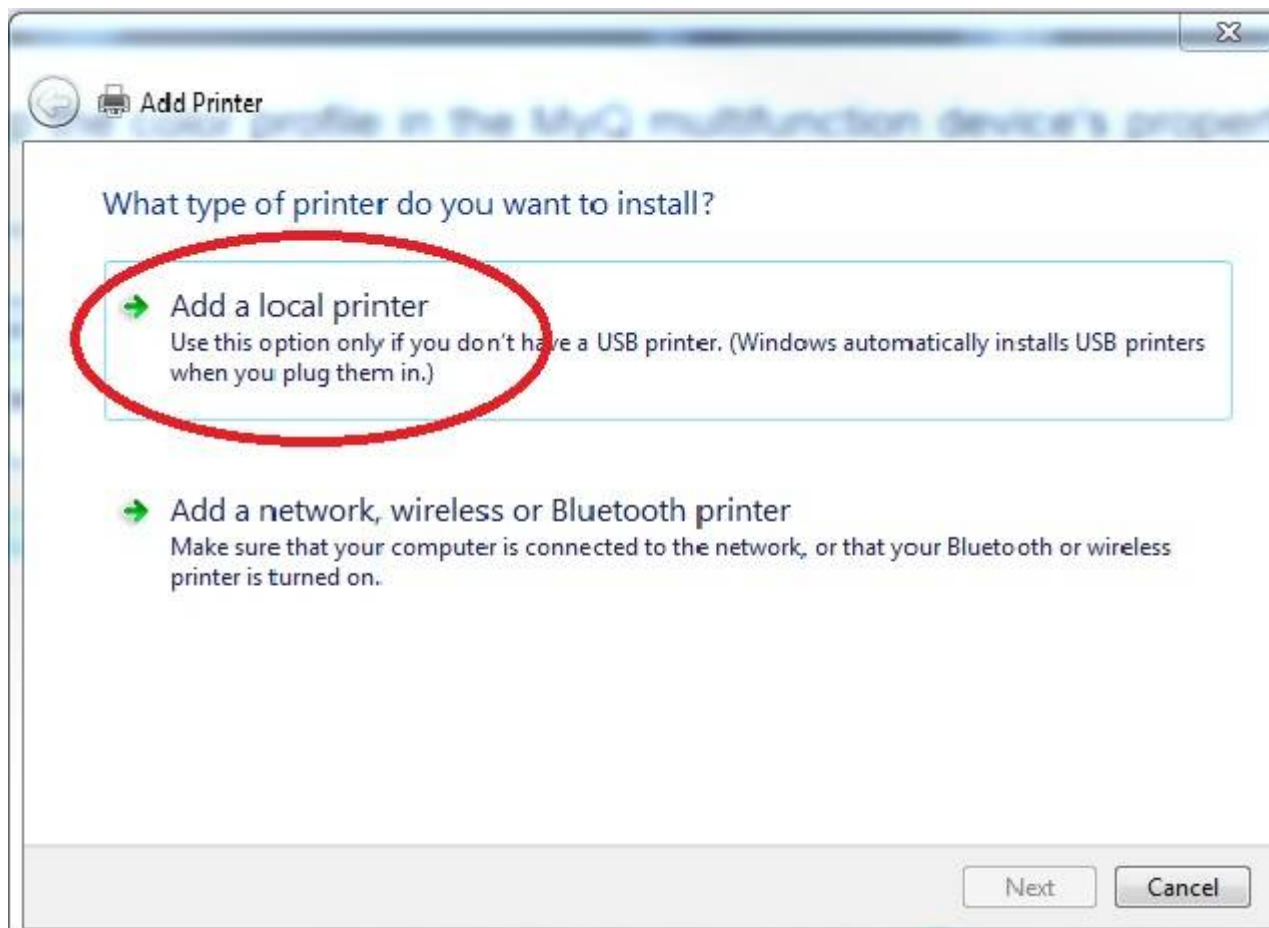

Create a new port: Standard TCP/IP Port

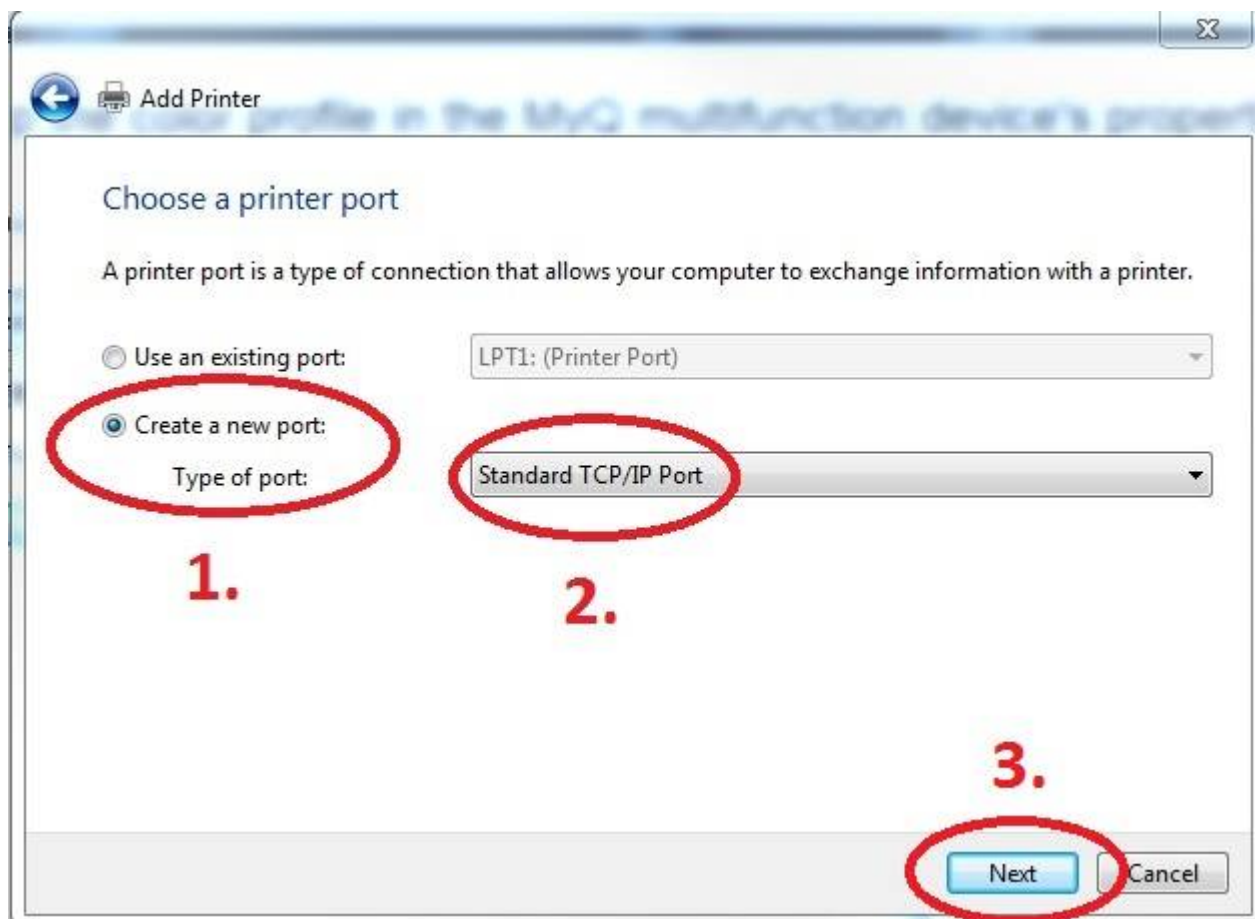

Enter Hostname - MyQ

The screenshot shows the 'Add Printer' wizard window. The title bar says 'Add Printer'. The main heading is 'Type a printer hostname or IP address'. Below this, there are three input fields: 'Device type:' with a dropdown menu showing 'TCP/IP Device', 'Hostname or IP address:' with the text 'MyQ', and 'Port name:' with the text 'MyQ'. A red circle is drawn around the 'MyQ' text in both the 'Hostname or IP address' and 'Port name' fields, with a red '1.' next to it. Below these fields is a checkbox labeled 'Query the printer and automatically select the driver to use', which is checked. At the bottom right, there are two buttons: 'Next' and 'Cancel'. The 'Next' button is circled in red with a red '2.' next to it.

Customize Settings

The first screenshot shows the 'Additional port information required' dialog box. It has a heading 'Additional port information required' and a message: 'The device is not found on the network. Be sure that:'. Below this are four numbered steps: 1. The device is turned on. 2. The network is connected. 3. The device is properly configured. 4. The address on the previous page is correct. Below the steps is a message: 'If you think the address is not correct, click Back to return to the previous page. Then correct the address and perform another search on the network. If you are sure the address is correct, select the device type below.' There are two radio buttons: 'Standard' and 'Custom'. The 'Custom' radio button is selected and circled in red with a red '1.' next to it. To the right of the 'Custom' radio button is a button labeled 'Settings...', which is also circled in red with a red '2.' next to it. At the bottom right, there are two buttons: 'Next' and 'Cancel'. The 'Next' button is circled in red with a red '7.' next to it.


The second screenshot shows the 'Configure Standard TCP/IP Port Monitor' dialog box. It has a title bar 'Configure Standard TCP/IP Port Monitor'. The 'Port Settings' tab is selected. There are several fields: 'Port Name:' with 'MyQ', 'Printer Name or IP Address:' with 'MyQ', and 'Protocol:' with 'Raw' selected. A red circle is drawn around the 'LPR' radio button, which is also selected, with a red '3.' next to it. Below the 'Protocol' section is the 'Raw Settings' section with 'Port Number:' set to '9100'. Below that is the 'LPR Settings' section with 'Queue Name:' set to 'FM'. A red circle is drawn around the 'LPR' radio button, which is also selected, with a red '4.' next to it. Below the 'LPR Settings' section is the 'SNMP Settings' section with 'LPR Byte Counting Enabled' checked (circled in red with a red '5.' next to it), 'SNMP Status Enabled' checked (circled in red with a red '6.' next to it), 'Community Name:' set to 'public', and 'SNMP Device Index:' set to '1'. At the bottom right, there are two buttons: 'OK' and 'Cancel'. The 'OK' button is circled in red with a red '6.' next to it.

Download driver and unzip it to the local folder (for example c:\driver\). Choose 32-bit or 64-bit version depending on your system:


- 32-bit driver

- 64-bit driver


Press Have Disk... Navigate to the driver folder (for example c:\driver\64-bit\) and select **"OEMSETUP"**.

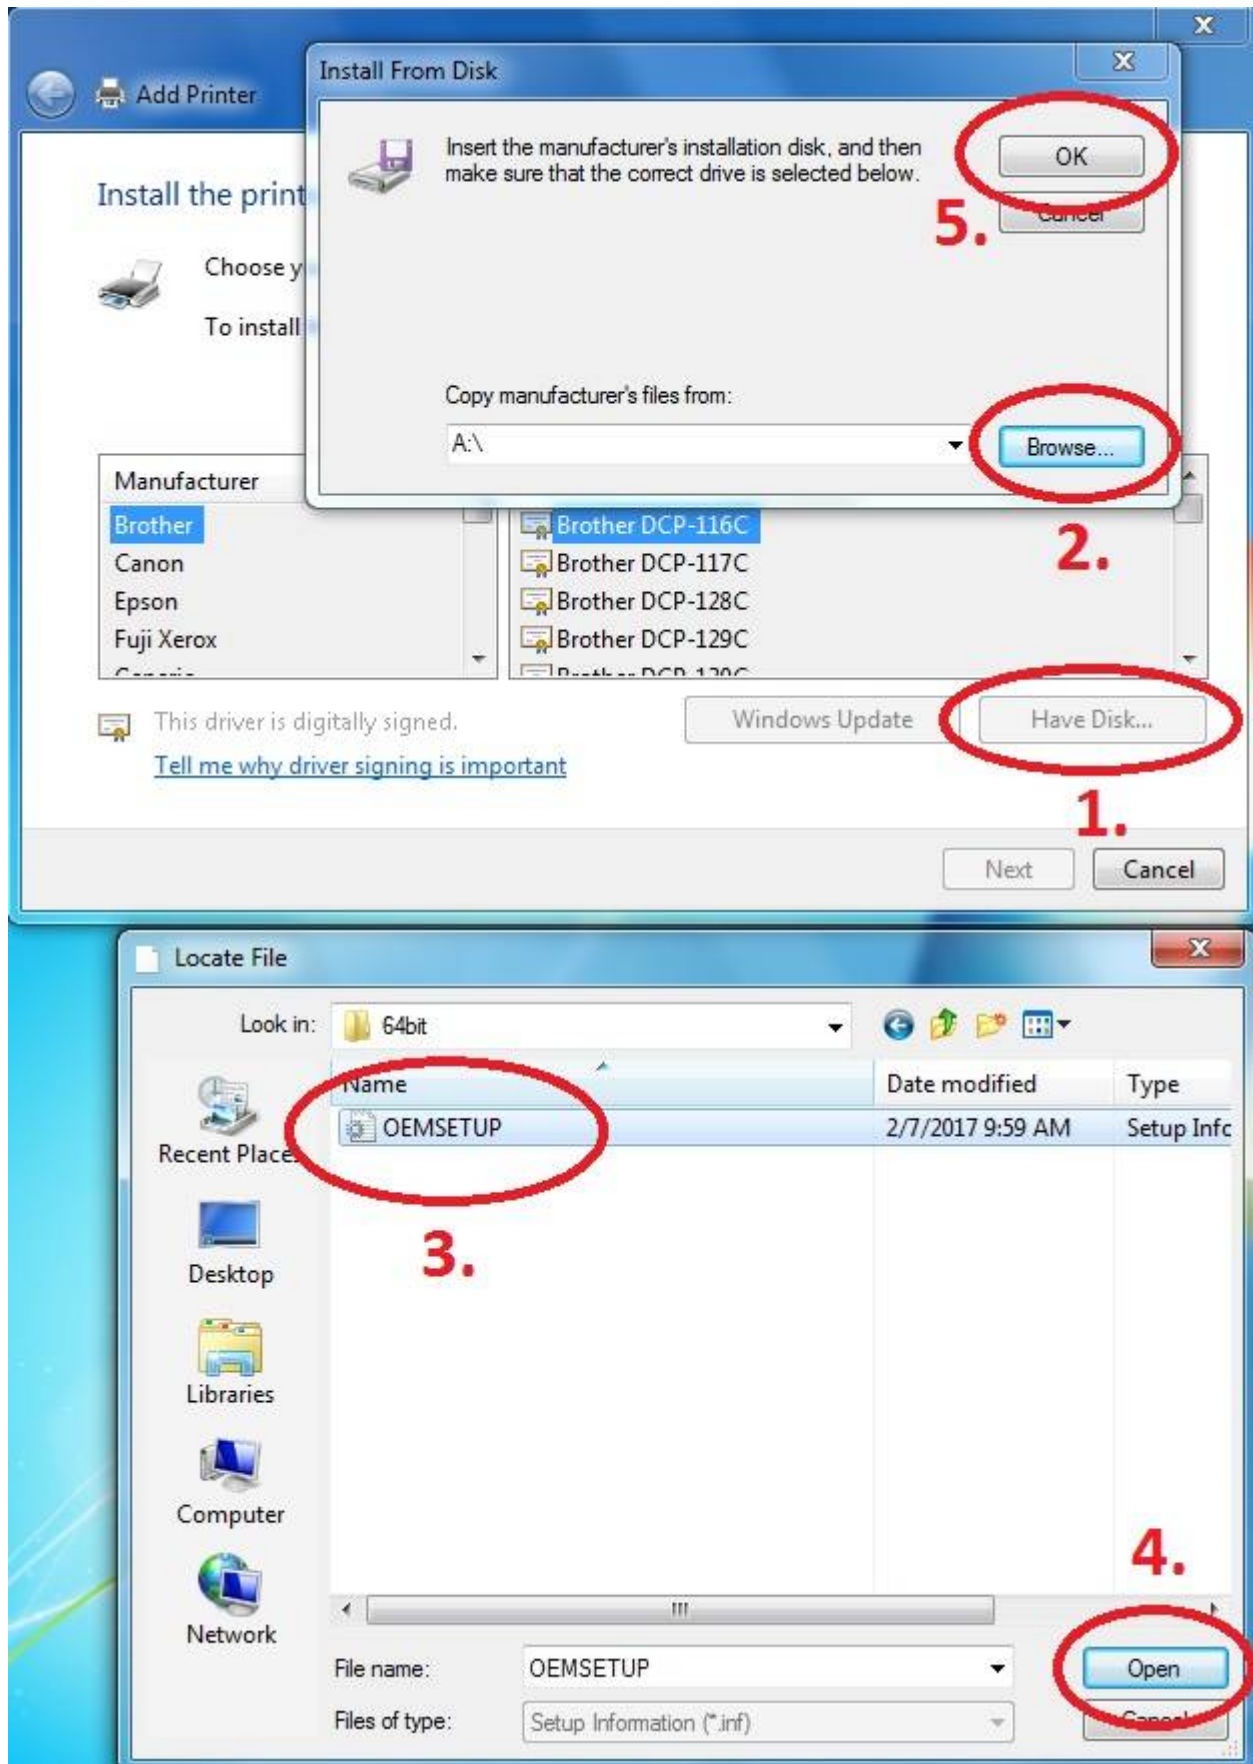

Choose Kyocera TASKalfa 8052ci KX

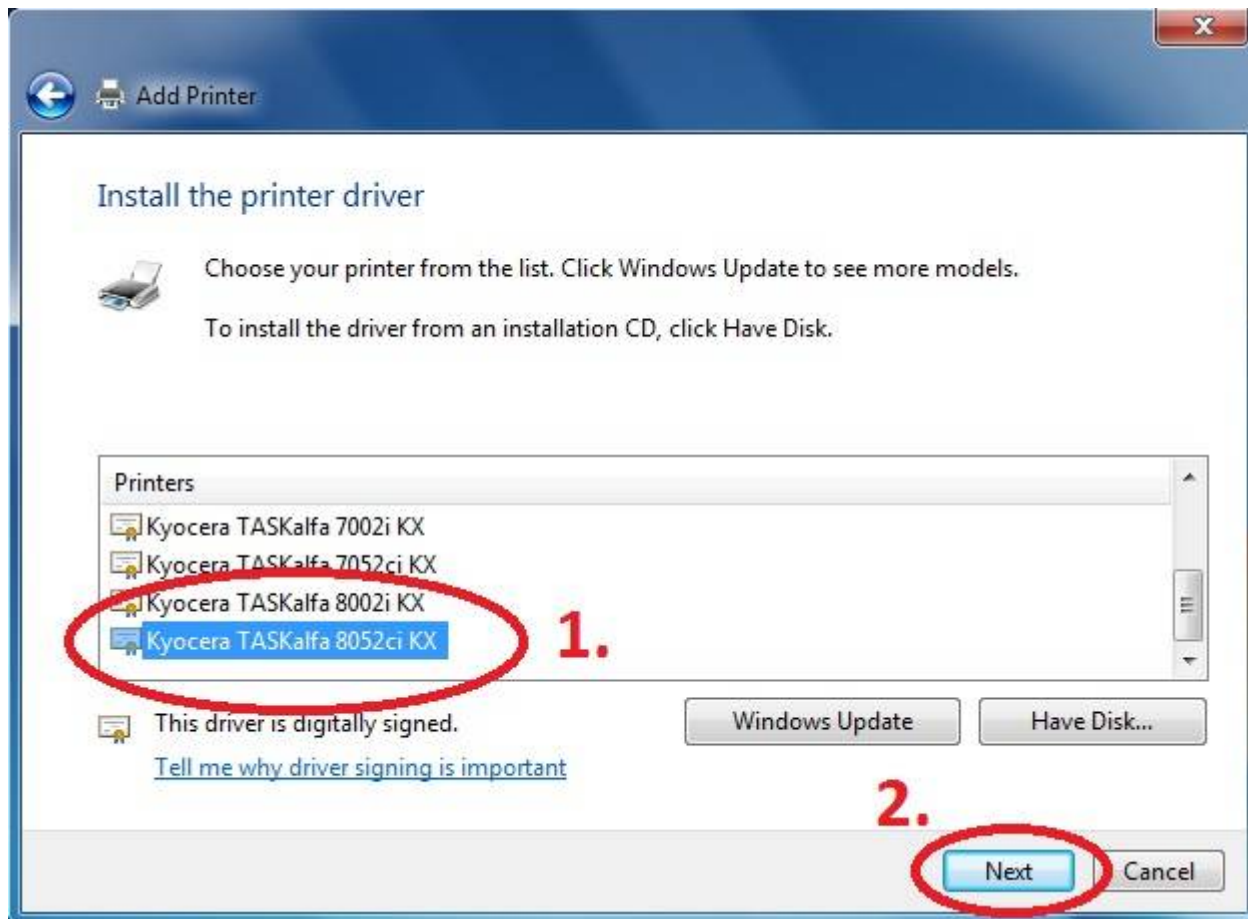

Rename Printer and finish installation.

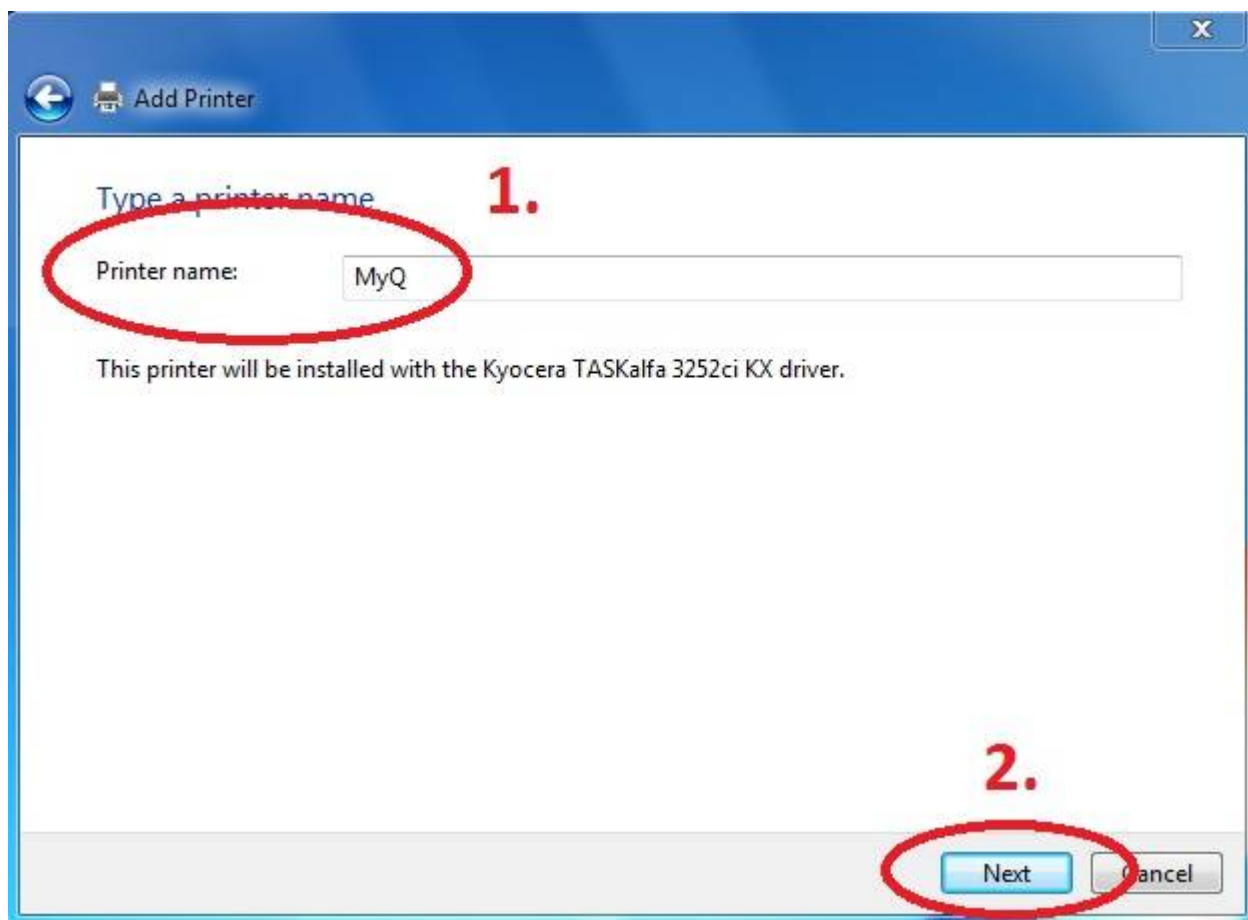



After installing the printer, send your username to

helpdesk@cerge-ei.cz and we will enable your account for printing.

For Advanced settings go to:

https://itinfo.cerge-ei.cz/doku.php?id=public:print:kyocera_profile

From:

<https://wiki.cerge-ei.cz/> - **CERGE-EI Infrastructure Services**

Permanent link:

https://wiki.cerge-ei.cz/doku.php?id=public:print:myq_install&rev=1515667689

Last update: **2018-01-11 10:48**

