



Instructions for adding a Kyocera printer to user stations

Important: notebook must be connected to WiFi residents !!! (libairfree WiFi is not supported)


Press Start button→ Devices and Printers → Add a Printer

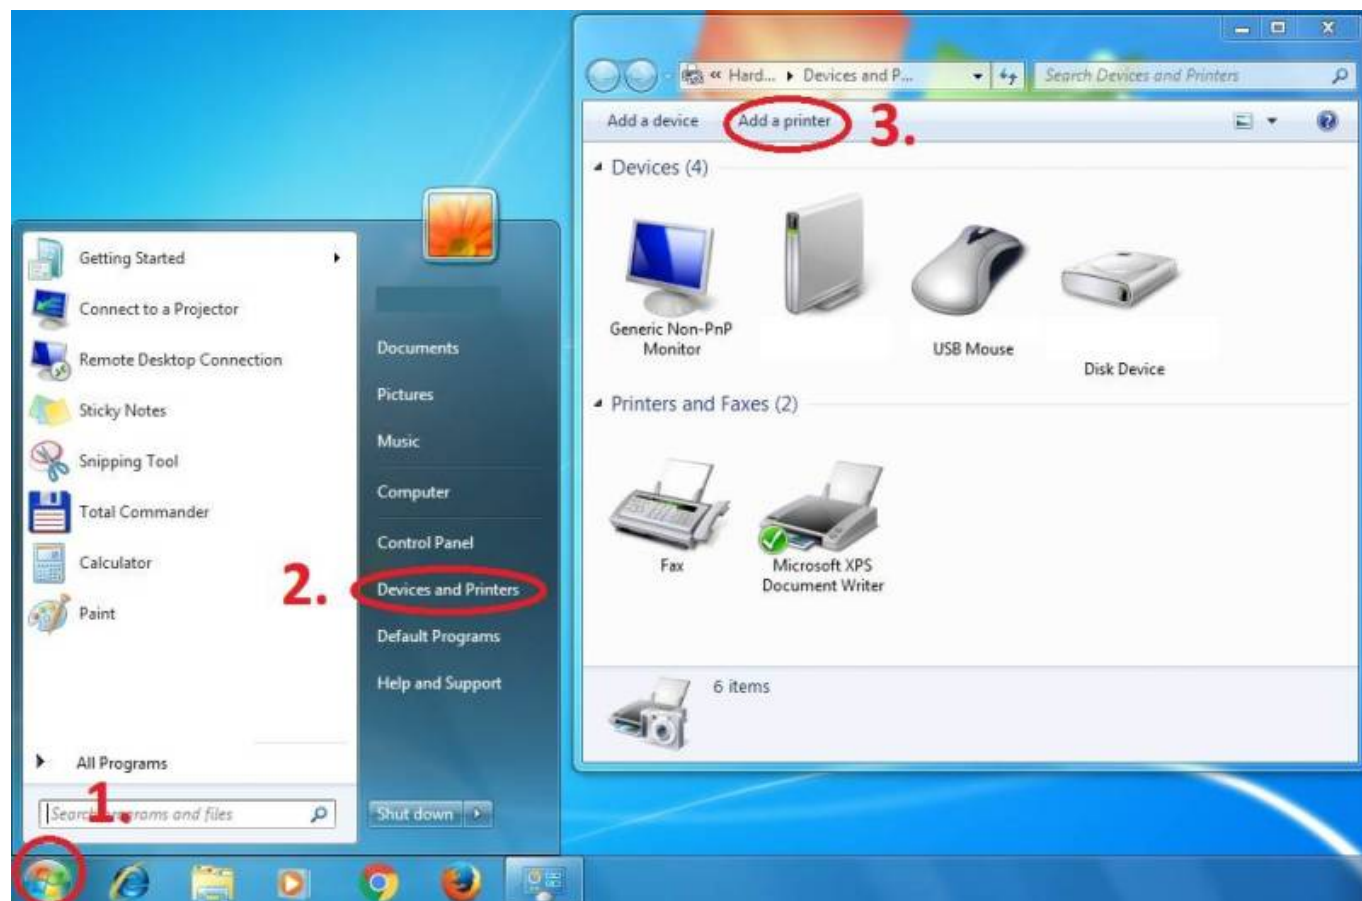

Add a local printer

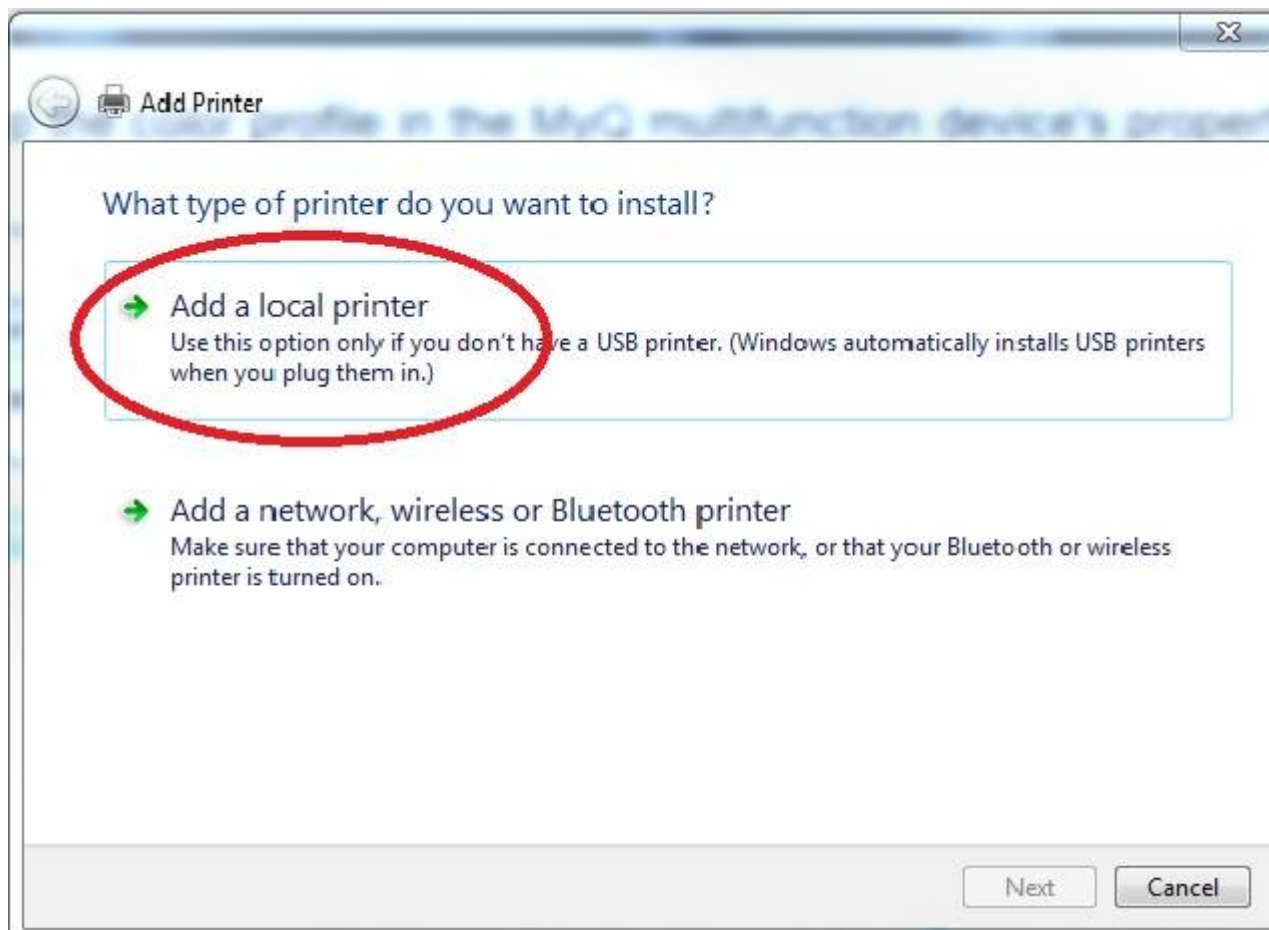

Create a new port: Standard TCP/IP Port

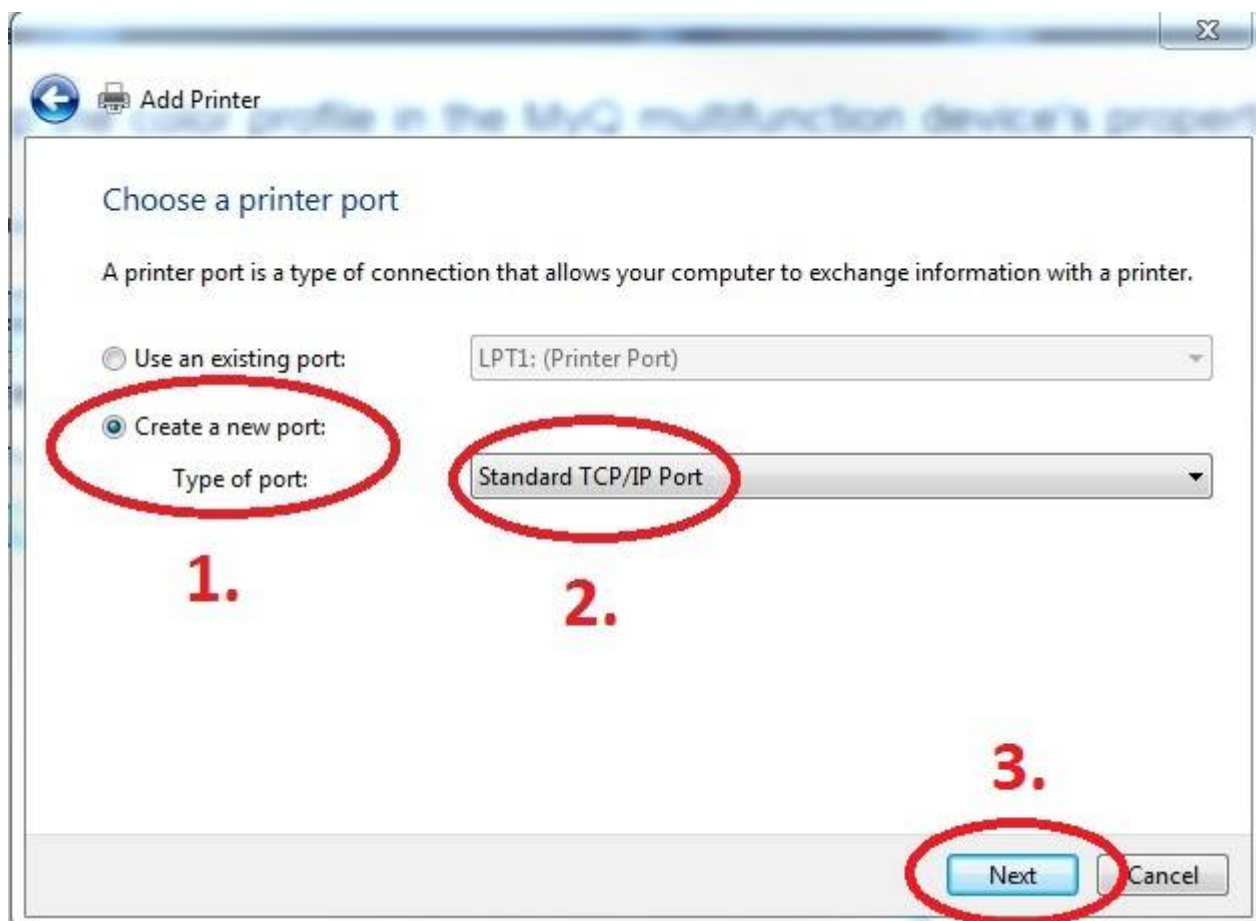

Enter Hostname - MyQ or myq.cerge-ei.cz

The screenshot shows the 'Add Printer' wizard window. The title bar says 'Add Printer'. The main heading is 'Type a printer hostname or IP address'. Below this, there are three input fields: 'Device type' (set to 'TCP/IP Device'), 'Hostname or IP address' (containing 'MyQ'), and 'Port name' (containing 'MyQ'). A red circle highlights the 'MyQ' text in the 'Hostname or IP address' field, with a red '1.' next to it. Below these fields is a checkbox labeled 'Query the printer and automatically select the driver to use', which is checked. At the bottom right, there are 'Next' and 'Cancel' buttons. A red circle highlights the 'Next' button, with a red '2.' next to it.

Customize Settings

Important settings (check twice)



- Protocol: **LPR**
- Queue name: **FM**
- [x] **LPR Byte Counting Enabled**

The screenshot shows two windows side-by-side. The left window is the 'Add Printer' wizard, Step 2: 'Additional port information required'. It has a heading 'Additional port information required' and a list of four steps: 1. The device is turned on. 2. The network is connected. 3. The device is properly configured. 4. The address on the previous page is correct. Below this, it says 'If you think the address is not correct, click Back to return to the previous page. Then correct the address and perform another search on the network. If you are sure the address is correct, select the device type below.' There are two radio buttons: 'Standard' (selected) and 'Custom' (selected). The 'Custom' button is circled in red with a red '1.' next to it. Below the 'Custom' button is a 'Settings...' button, also circled in red with a red '2.' next to it. At the bottom right, there are 'Next' and 'Cancel' buttons. A red circle highlights the 'Next' button, with a red '7.' next to it. The right window is the 'Configure Standard TCP/IP Port Monitor' dialog. It has a title bar 'Configure Standard TCP/IP Port Monitor'. The 'Port Settings' tab is active. It has fields for 'Port Name' (MyQ), 'Printer Name or IP Address' (MyQ), and 'Protocol' (LPR). The 'LPR' radio button is circled in red with a red '3.' next to it. Below these are 'Raw Settings' (Port Number: 9100) and 'LPR Settings' (Queue Name: FM). The 'Queue Name' field is circled in red with a red '4.' next to it. Below the 'Queue Name' field is a checkbox labeled 'LPR Byte Counting Enabled', which is checked. This checkbox is circled in red with a red '5.' next to it. Below this is a checkbox labeled 'SNMP Status Enabled', which is unchecked. Below these are fields for 'Community Name' (public) and 'SNMP Device Index' (1). At the bottom right, there are 'OK' and 'Cancel' buttons. A red circle highlights the 'OK' button, with a red '6.' next to it.


Download driver and unzip it to the local folder (for example c:\driver\). Choose 32-bit or 64-bit version depending on your system:

- 32-bit driver


- 64-bit driver

Mac OS X 10.5 and newer**


Press Have Disk... Navigate to the driver folder (for example c:\driver\64-bit\) and select "OEMSETUP".

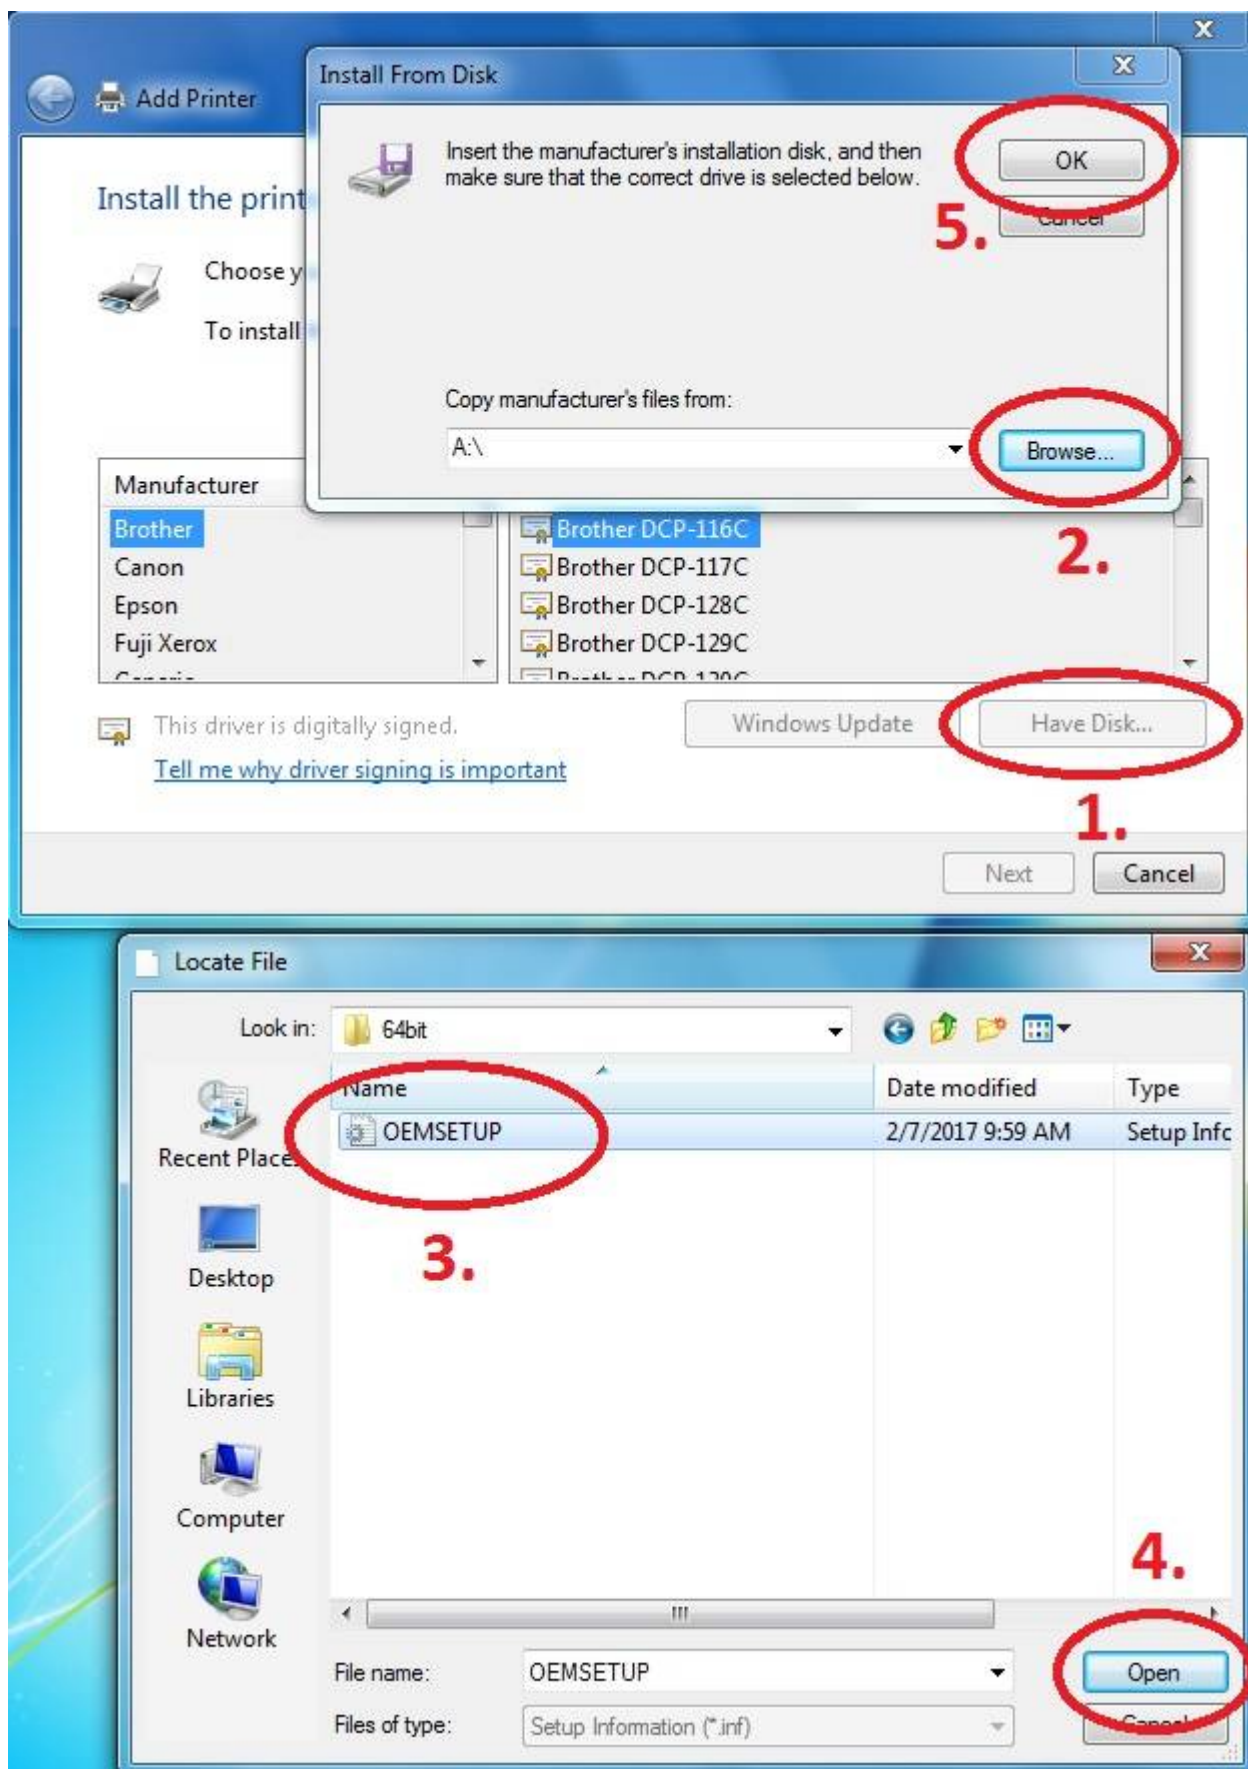

Choose Kyocera TASKalfa 8052ci KX

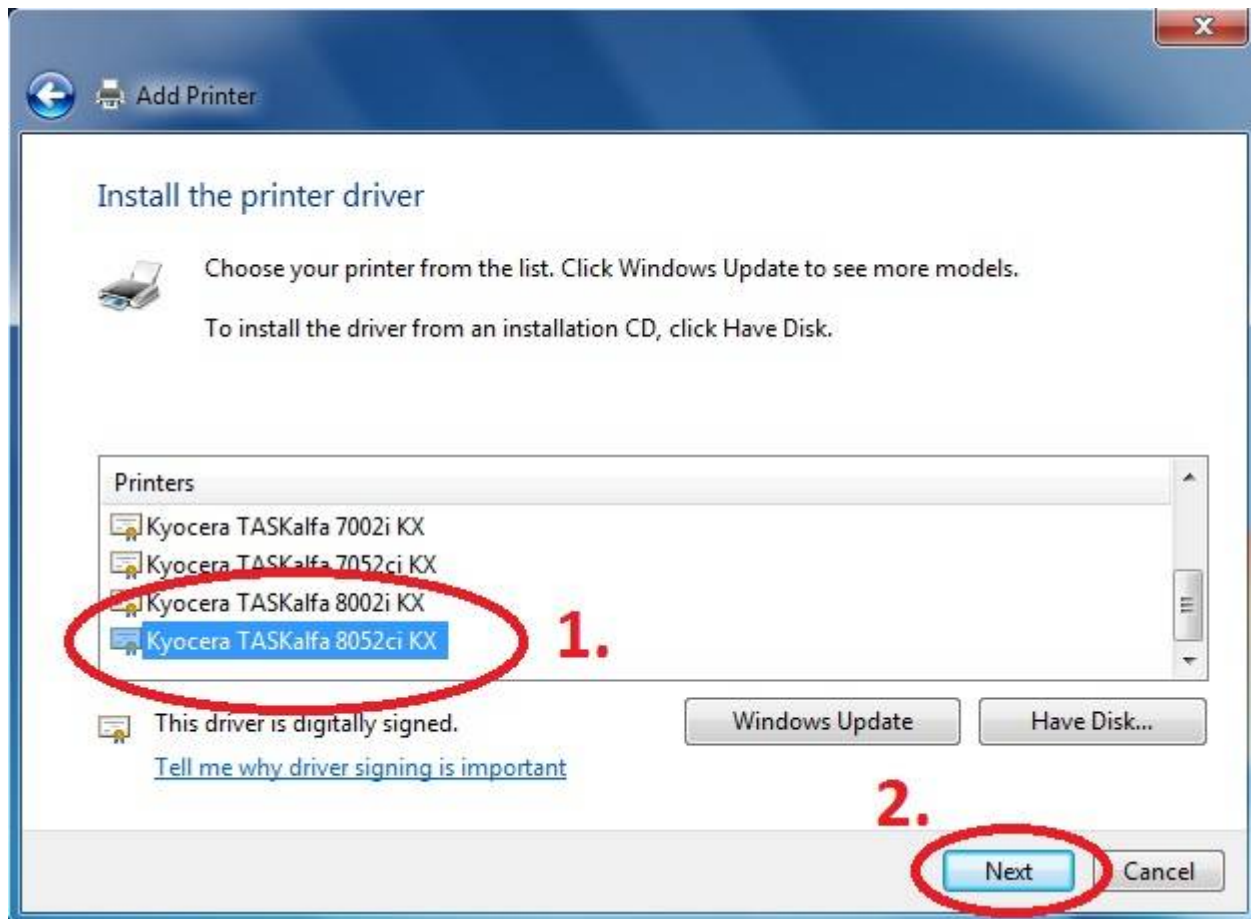

Rename Printer and finish installation.

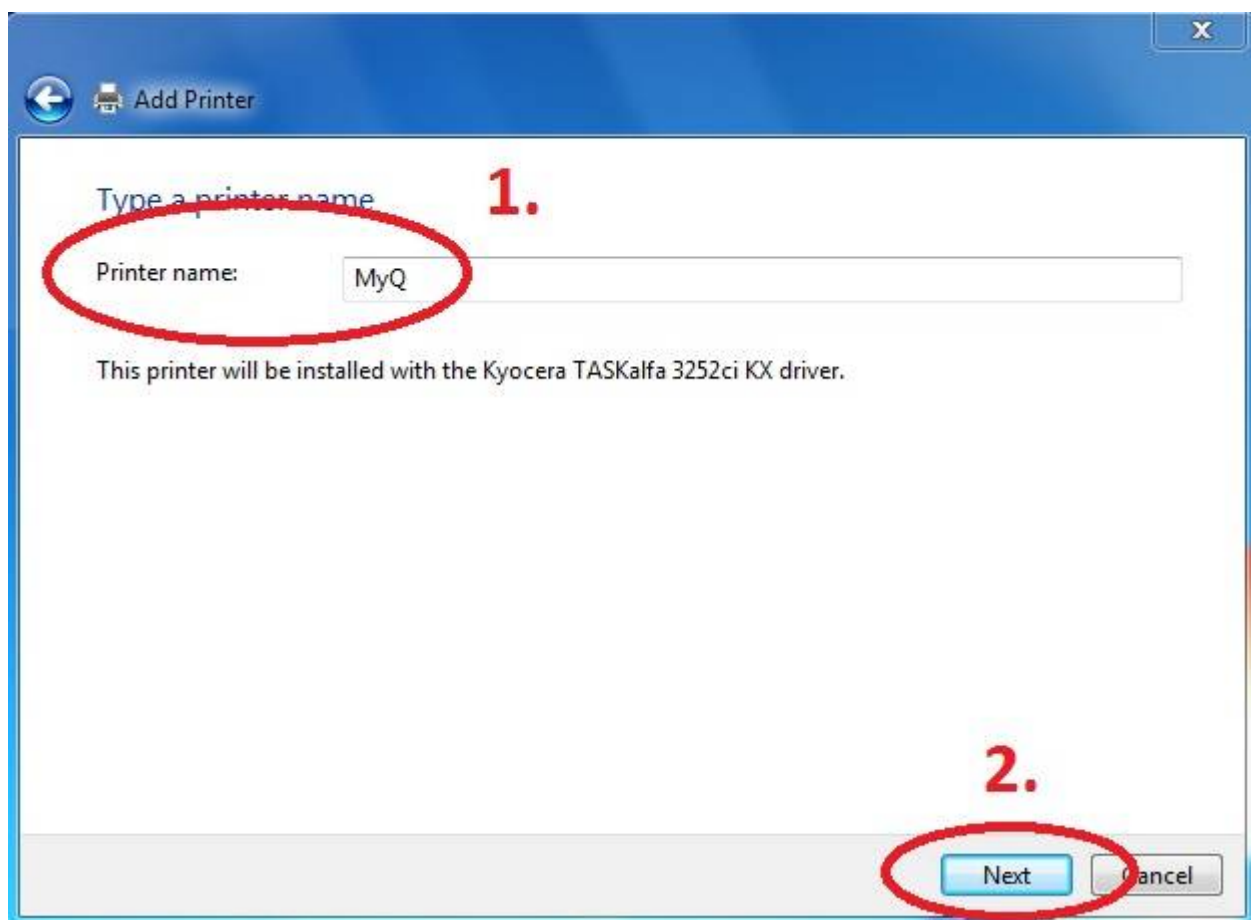



After installing the printer, send your local username on the notebook to

helpdesk@cerge-ei.cz and we will allow printing for your account.

For Advanced settings go to:

https://itinfo.cerge-ei.cz/doku.php?id=public:print:kyocera_profile

From:

<https://wiki.cerge-ei.cz/> - **CERGE-EI Infrastructure Services**

Permanent link:

https://wiki.cerge-ei.cz/doku.php?id=public:print:myq_notebooks&rev=1548941339

Last update: **2019-01-31 13:28**

