



# Instructions for adding a Kyocera printer to user stations

**Important: notebook must be connected to WiFi residents !!!** (libairfree WiFi is not supported)


**Press Start button→ Devices and Printers → Add a Printer**

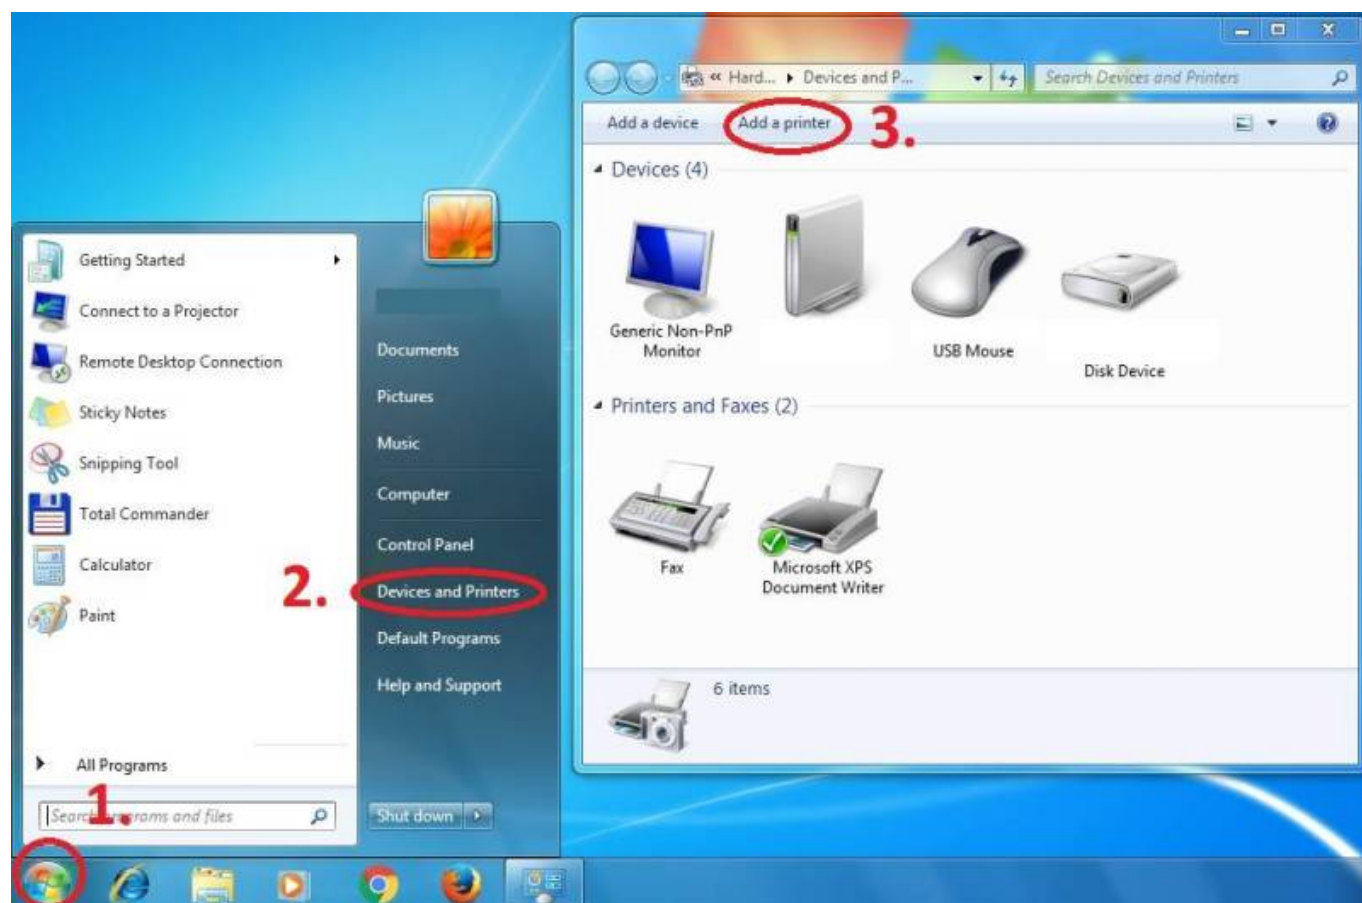

**Add a local printer**

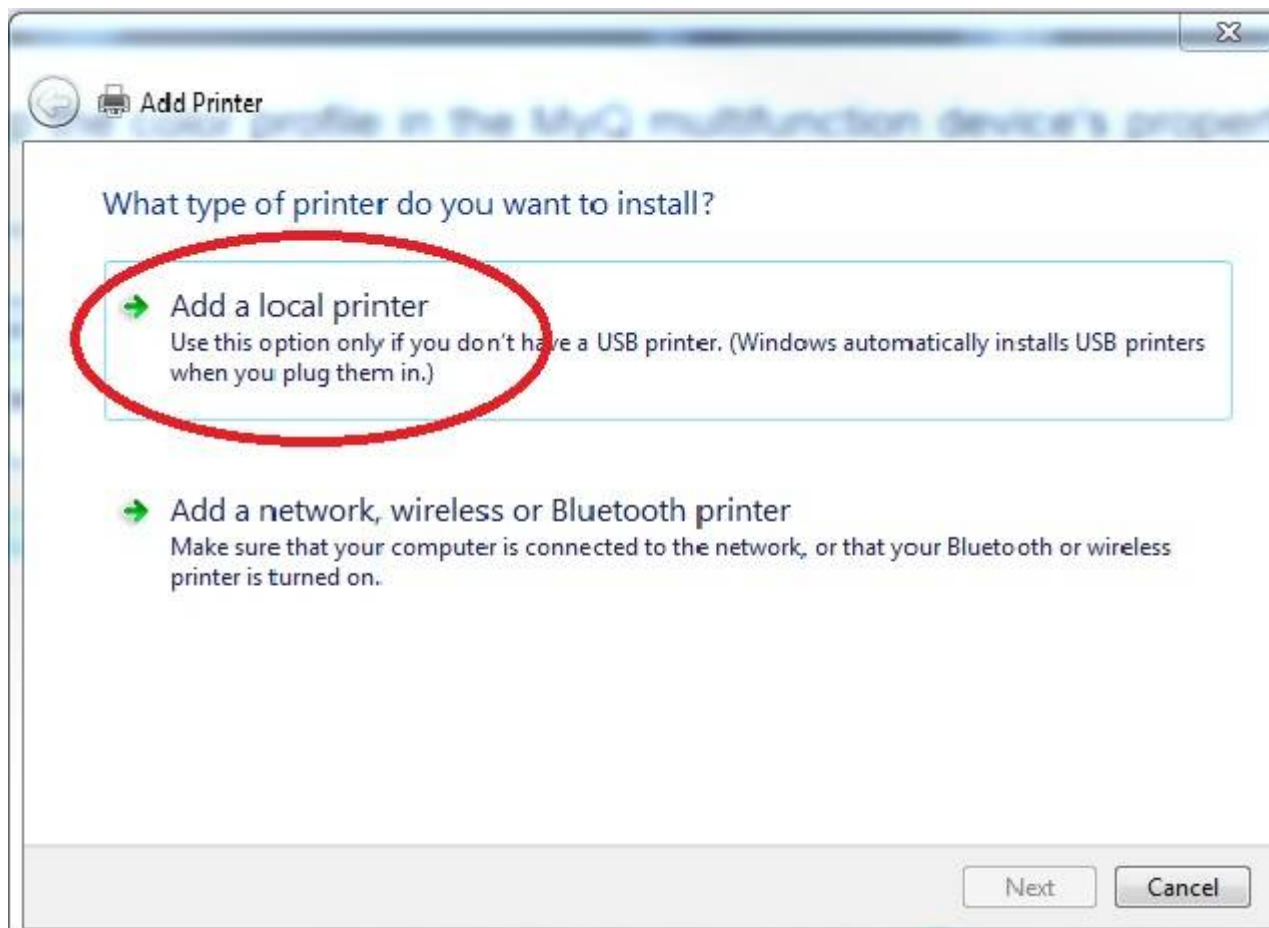

### Create a new port: Standard TCP/IP Port

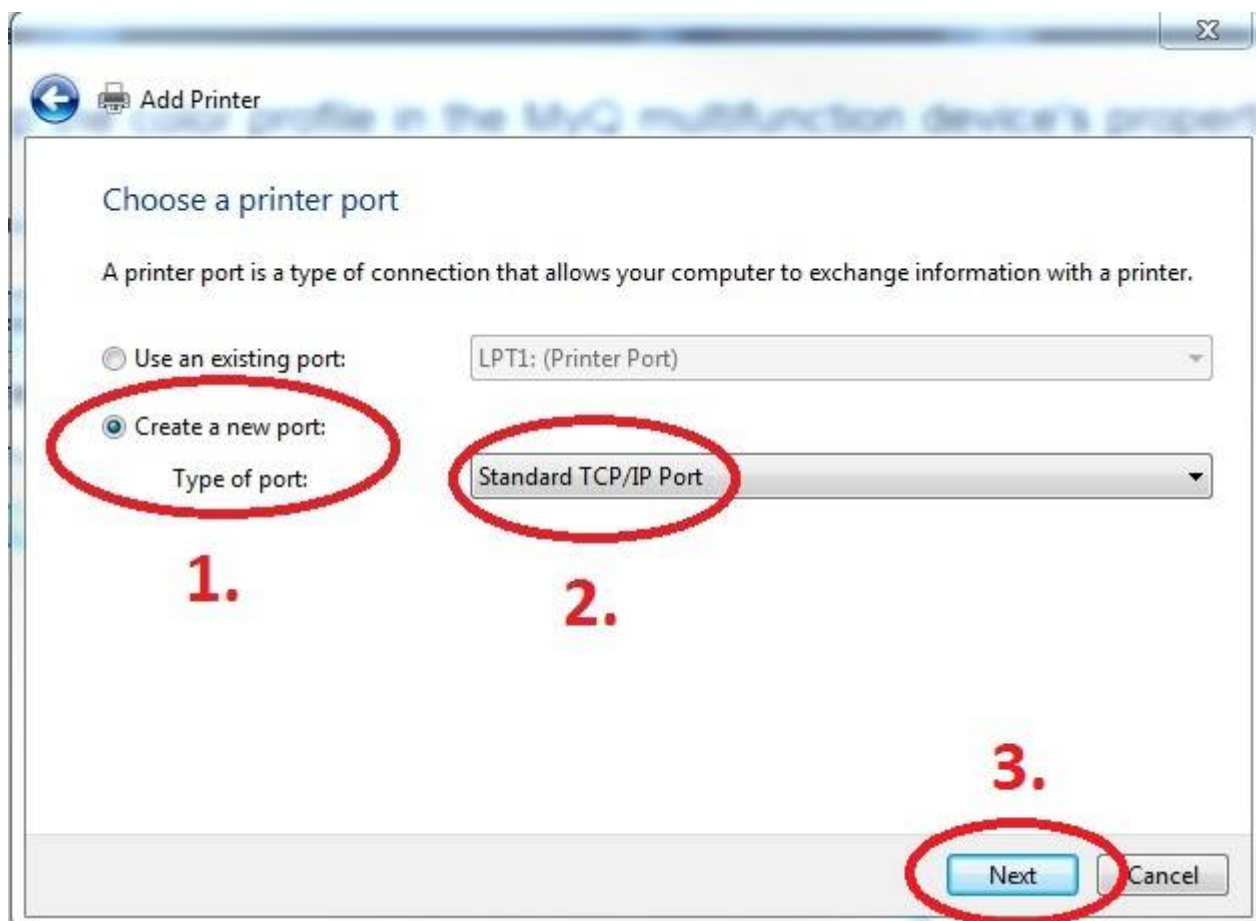

## Enter Hostname - myq.cerge-ei.cz

The screenshot shows the 'Add Printer' wizard window. The title bar says 'Add Printer'. The main instruction is 'Type a printer hostname or IP address'. There are three input fields: 'Device type' (set to 'TCP/IP Device'), 'Hostname or IP address' (containing 'myq.cerge-ei.cz'), and 'Port name' (containing 'myq.cerge-ei.cz'). A red circle highlights the 'Hostname or IP address' field with a red '1.' next to it. Below the fields is a checkbox labeled 'Query the printer and automatically select the driver to use' which is checked. At the bottom right, there are 'Next' and 'Cancel' buttons. A red circle highlights the 'Next' button with a red '2.' next to it.

## Customize Settings

Important settings (check twice)



- Protocol: **LPR**
- Queue name: **FM**
- [x] **LPR Byte Counting Enabled**

The screenshot shows the 'Add Printer' wizard window, Step 2: 'Additional port information required'. The title bar says 'Add Printer'. The main instruction is 'Additional port information required'. Below this, there is a list of four steps: 1. The device is turned on. 2. The network is connected. 3. The device is properly configured. 4. The address on the previous page is correct. Below the list, there is a message: 'If you think the address is not correct, click Back to return to the previous page. Then correct the address and perform another search on the network. If you are sure the address is correct, select the device type below.' There are two radio buttons: 'Standard' (selected) and 'Custom' (selected). Below 'Custom' is a 'Settings...' button. A red circle highlights the 'Custom' radio button with a red '1.' next to it. A red circle highlights the 'Settings...' button with a red '2.' next to it. At the bottom right, there are 'Next' and 'Cancel' buttons. A red circle highlights the 'Next' button with a red '7.' next to it. To the right of the main window is a 'Configure Standard TCP/IP Port Monitor' dialog box. The title bar says 'Configure Standard TCP/IP Port Monitor'. It has a 'Port Settings' tab. There are two input fields: 'Port Name' (containing 'MyQ') and 'Printer Name or IP Address' (containing 'MyQ'). A red circle highlights the 'Printer Name or IP Address' field with a red '3.' next to it. Below these fields are two radio buttons: 'Raw' (selected) and 'LPR' (selected). A red circle highlights the 'LPR' radio button with a red '4.' next to it. Below the radio buttons are two sections: 'Raw Settings' and 'LPR Settings'. Under 'Raw Settings', there is a 'Port Number' field (containing '9100'). Under 'LPR Settings', there is a 'Queue Name' field (containing 'FM'). A red circle highlights the 'Queue Name' field with a red '4.' next to it. Below the 'Queue Name' field is a checkbox labeled 'LPR Byte Counting Enabled' which is checked. A red circle highlights this checkbox with a red '5.' next to it. Below the checkbox is a checkbox labeled 'SNMP Status Enabled' which is unchecked. Below the 'SNMP Status Enabled' checkbox is a 'Community Name' field (containing 'public'). Below the 'Community Name' field is an 'SNMP Device Index' field (containing '1'). At the bottom right of the dialog box, there are 'OK' and 'Cancel' buttons. A red circle highlights the 'OK' button with a red '6.' next to it.

**Download driver and unzip it to the local folder (for example c:\driver\). Choose 32-bit or 64-bit version depending on your system:**

**- 32-bit driver**


**- 64-bit driver**

Mac OS:

**OS X 10.8 - 10.13**


**Mac OS X 10.5 and newer\*\***

**Press Have Disk... Navigate to the driver folder (for example c:\driver\64-bit\) and select "OEMSETUP".**

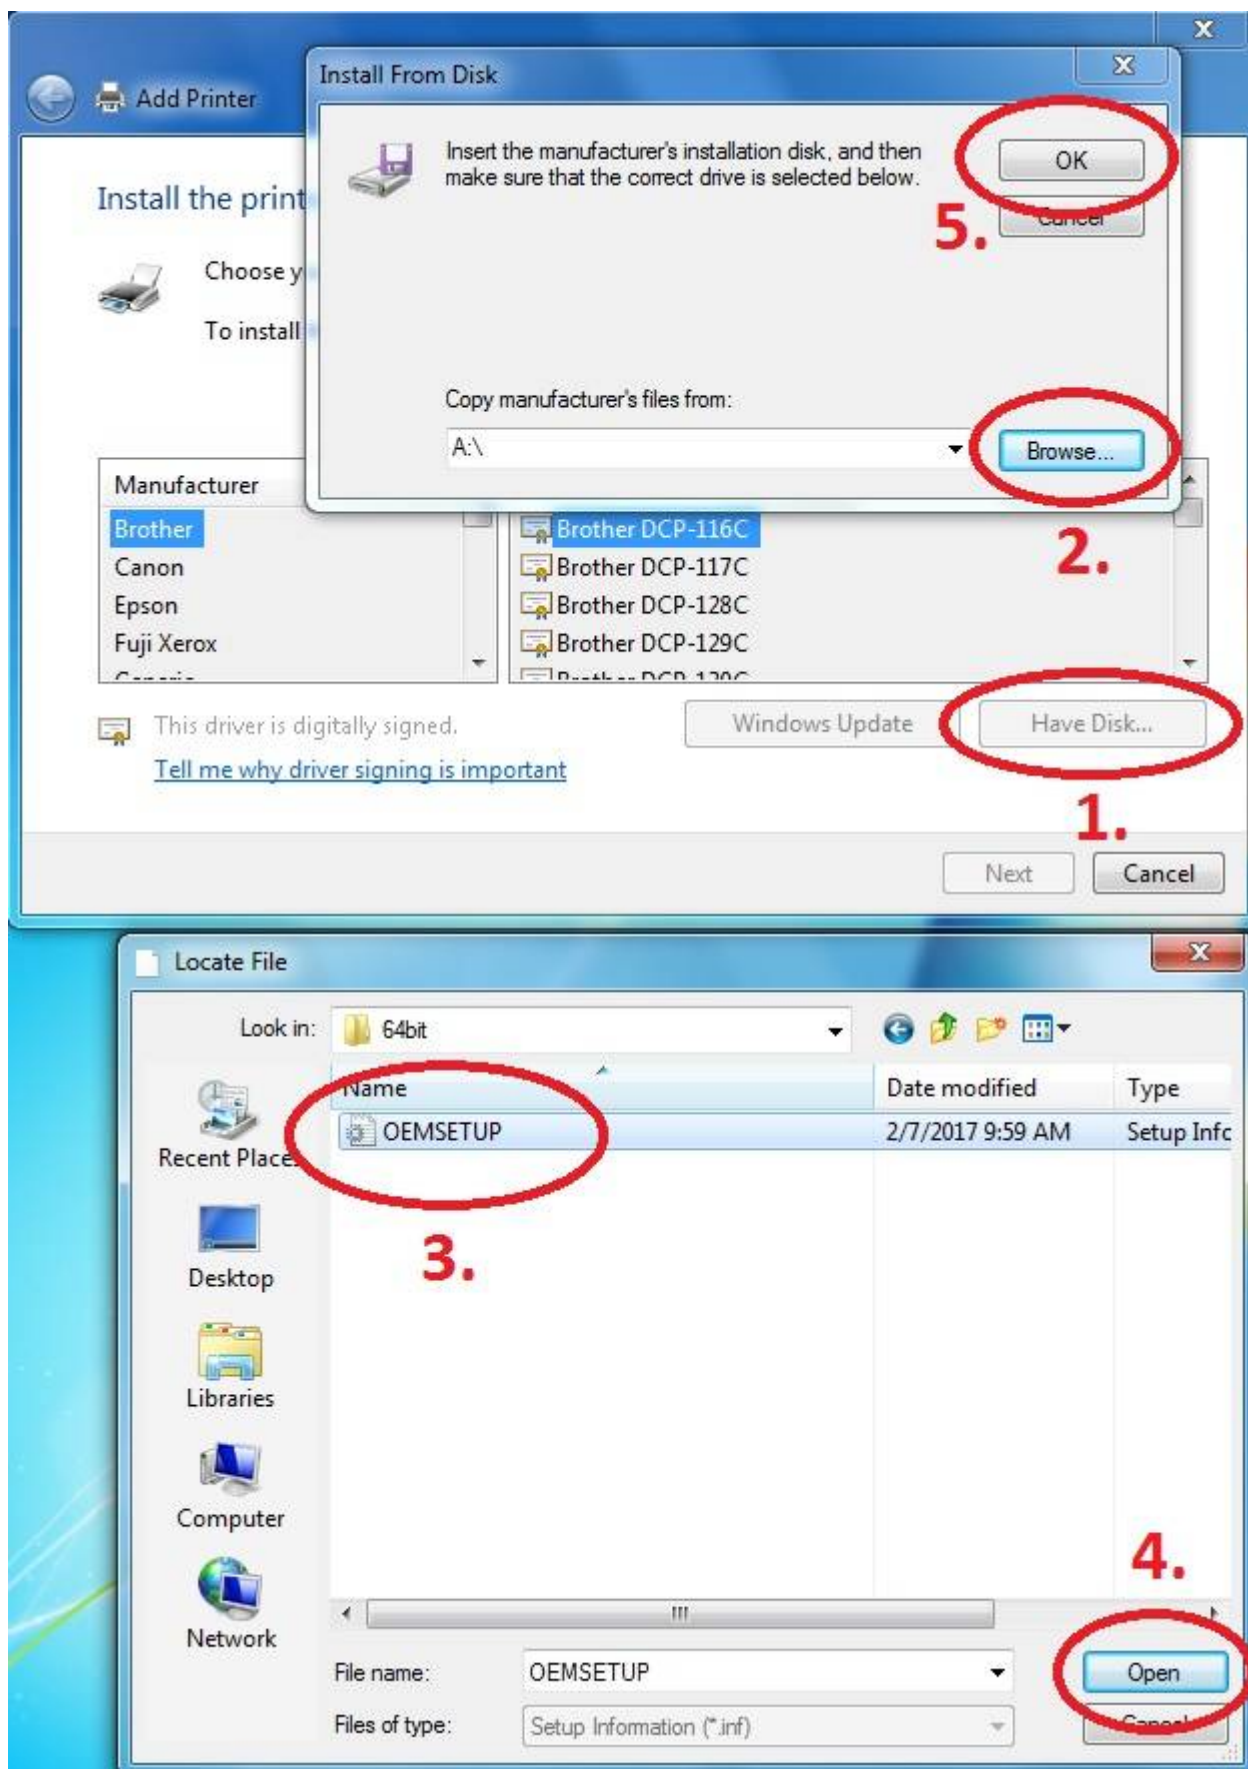


**Choose Kyocera TASKalfa 8052ci KX**



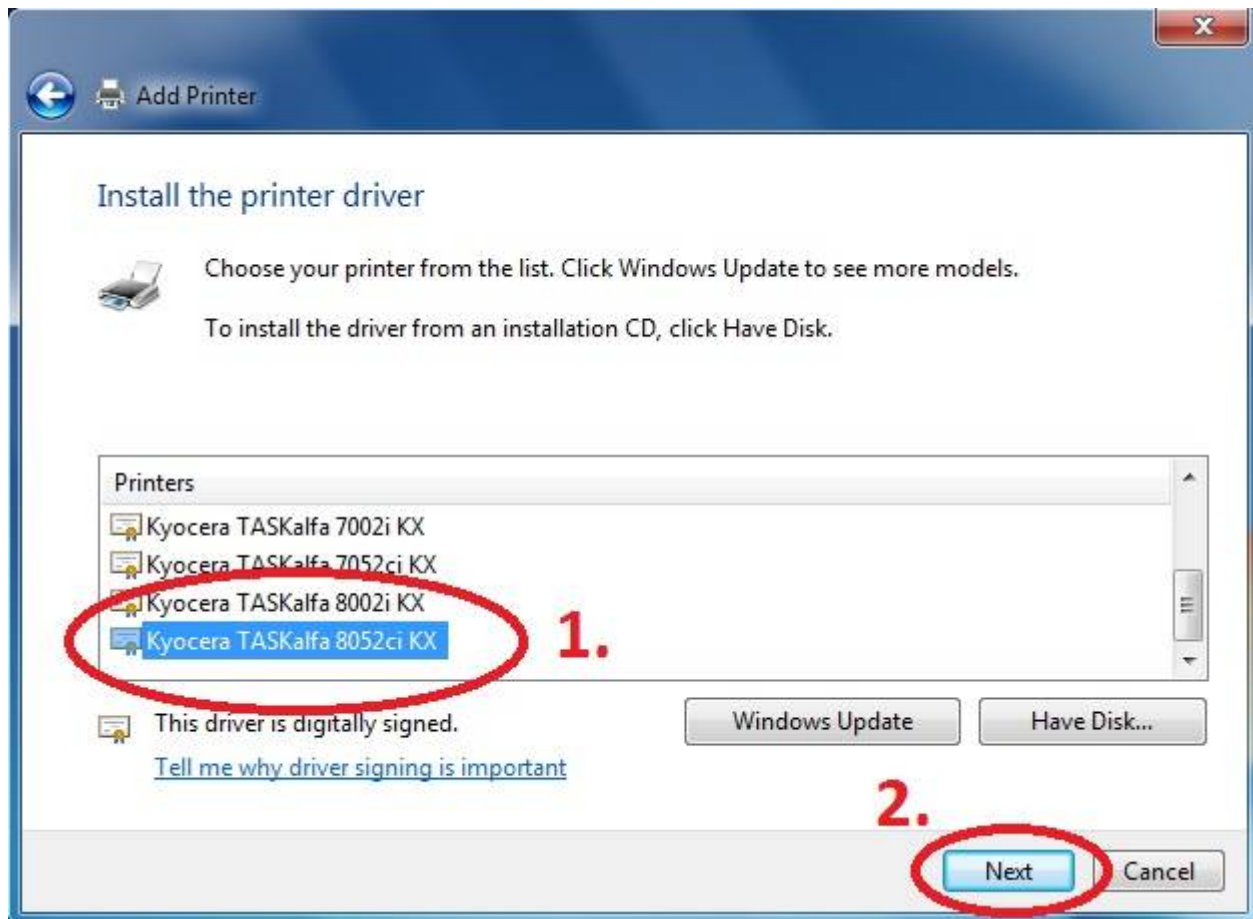

**Rename Printer and finish installation.**

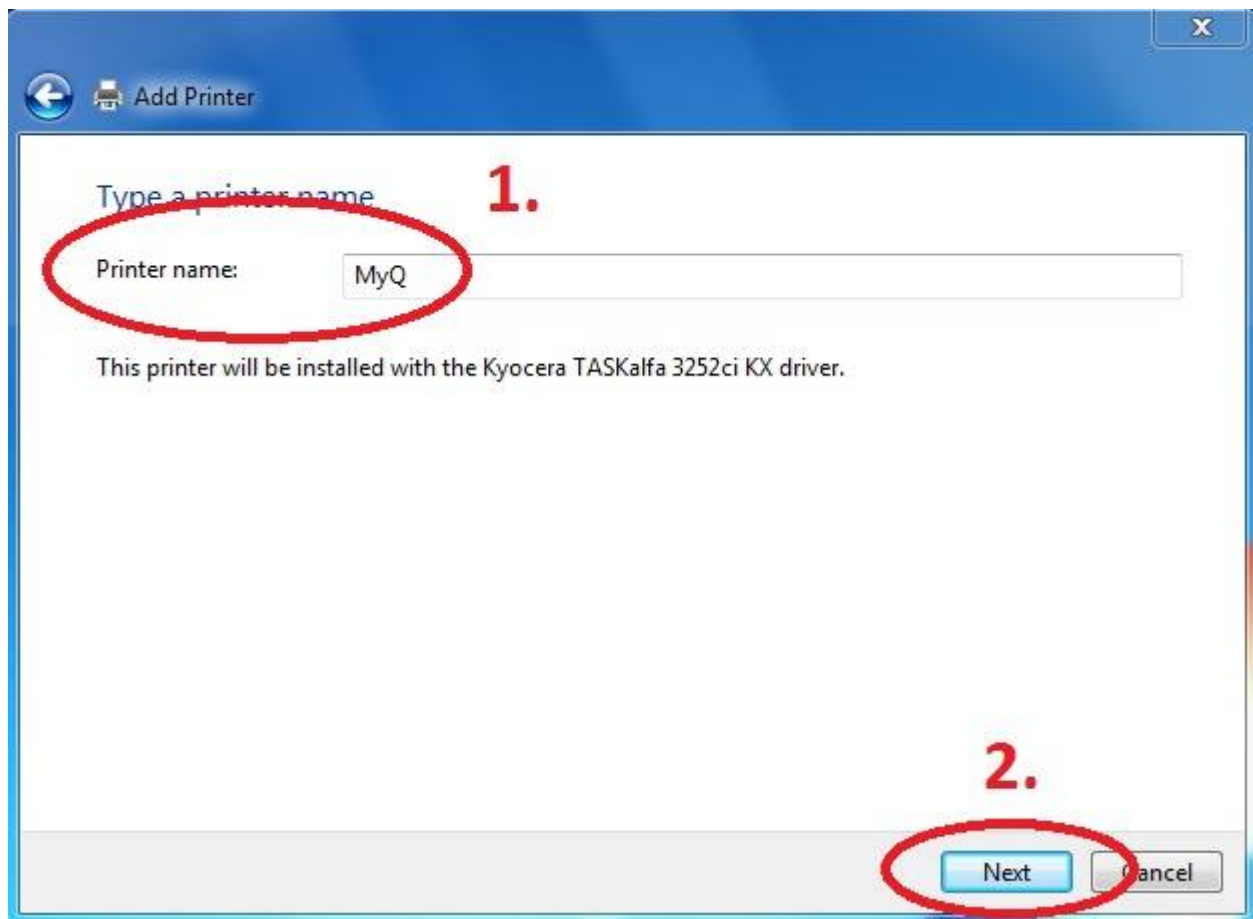



After installing the printer, send your local username on the notebook to

**helpdesk@cerge-ei.cz** and we will allow printing for your account.

**For Advanced settings go to:**

[https://itinfo.cerge-ei.cz/doku.php?id=public:print:kyocera\\_profile](https://itinfo.cerge-ei.cz/doku.php?id=public:print:kyocera_profile)

From:

<https://wiki.cerge-ei.cz/> - **CERGE-EI Infrastructure Services**

Permanent link:

[https://wiki.cerge-ei.cz/doku.php?id=public:print:myq\\_notebooks&rev=1553693818](https://wiki.cerge-ei.cz/doku.php?id=public:print:myq_notebooks&rev=1553693818)

Last update: **2019-03-27 13:36**

