


Instructions for adding a Kyocera printer to user stations


Important: notebook must be connected to WiFi residents !!! (libairfree WiFi is not supported)

Queue link: `lpd://myq.cerge-ei.cz/FM`


Press Start button → Devices and Printers → Add a Printer

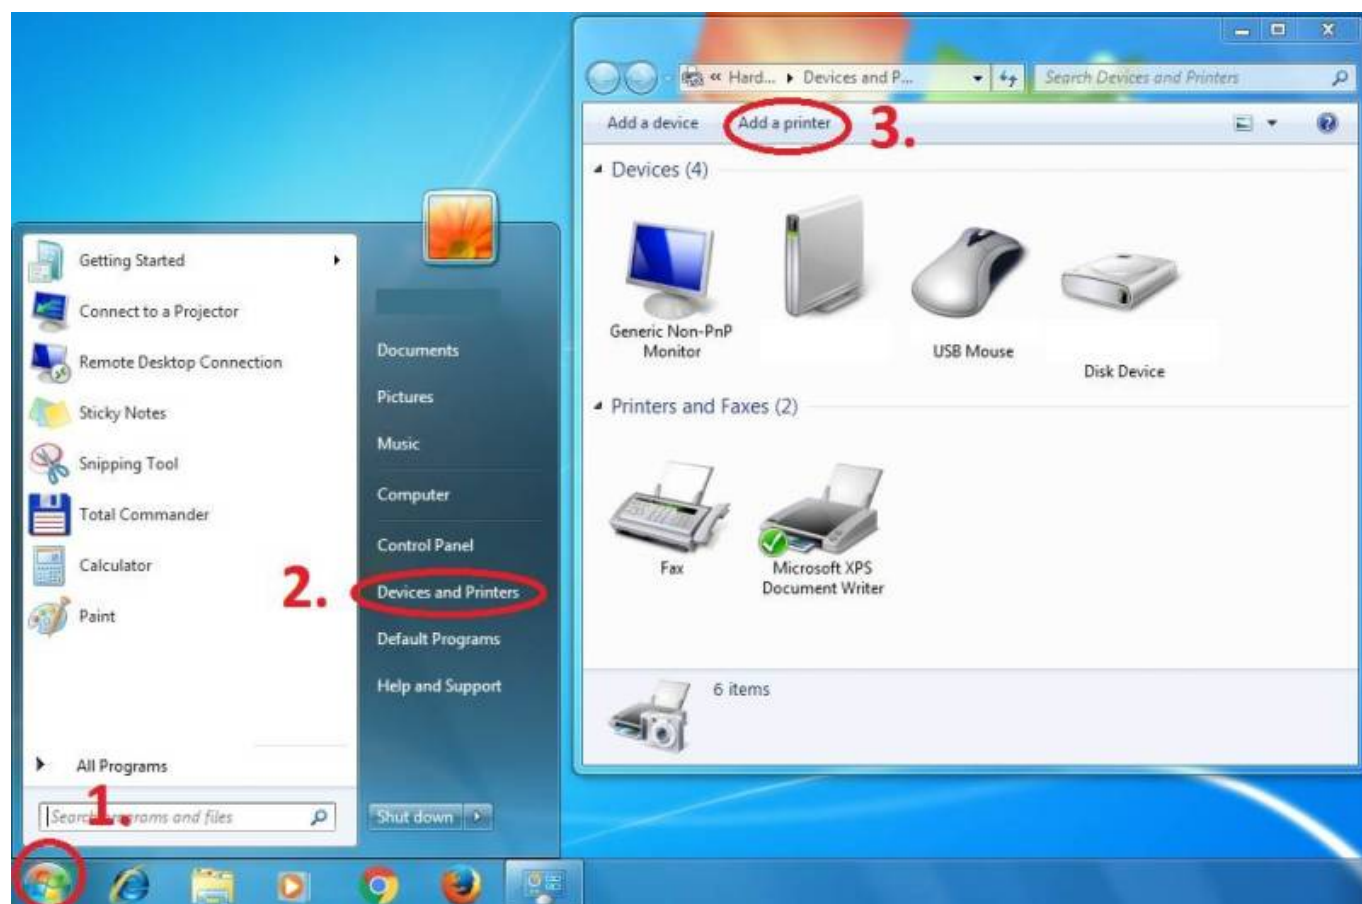

Add a local printer

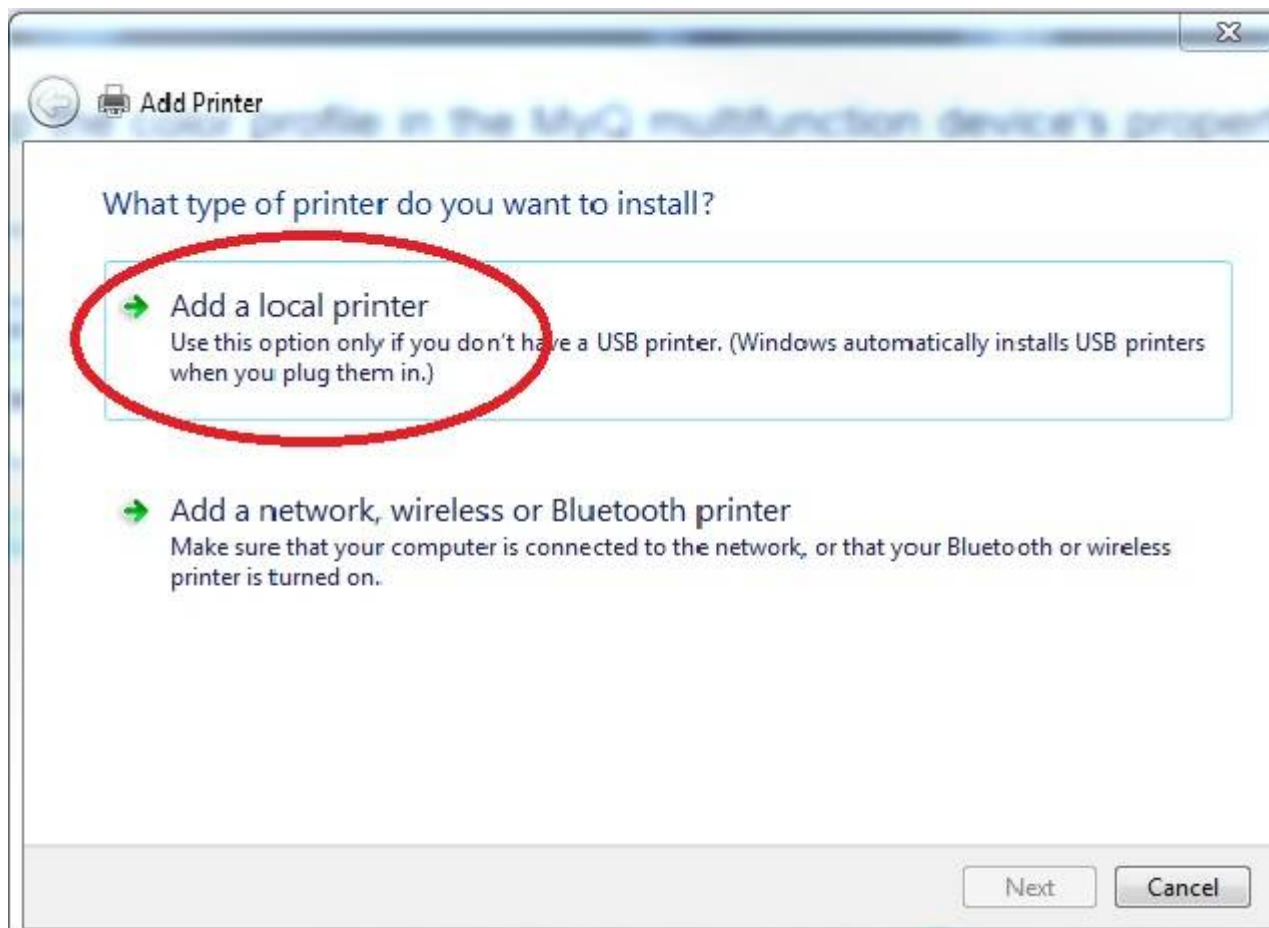

Create a new port: Standard TCP/IP Port

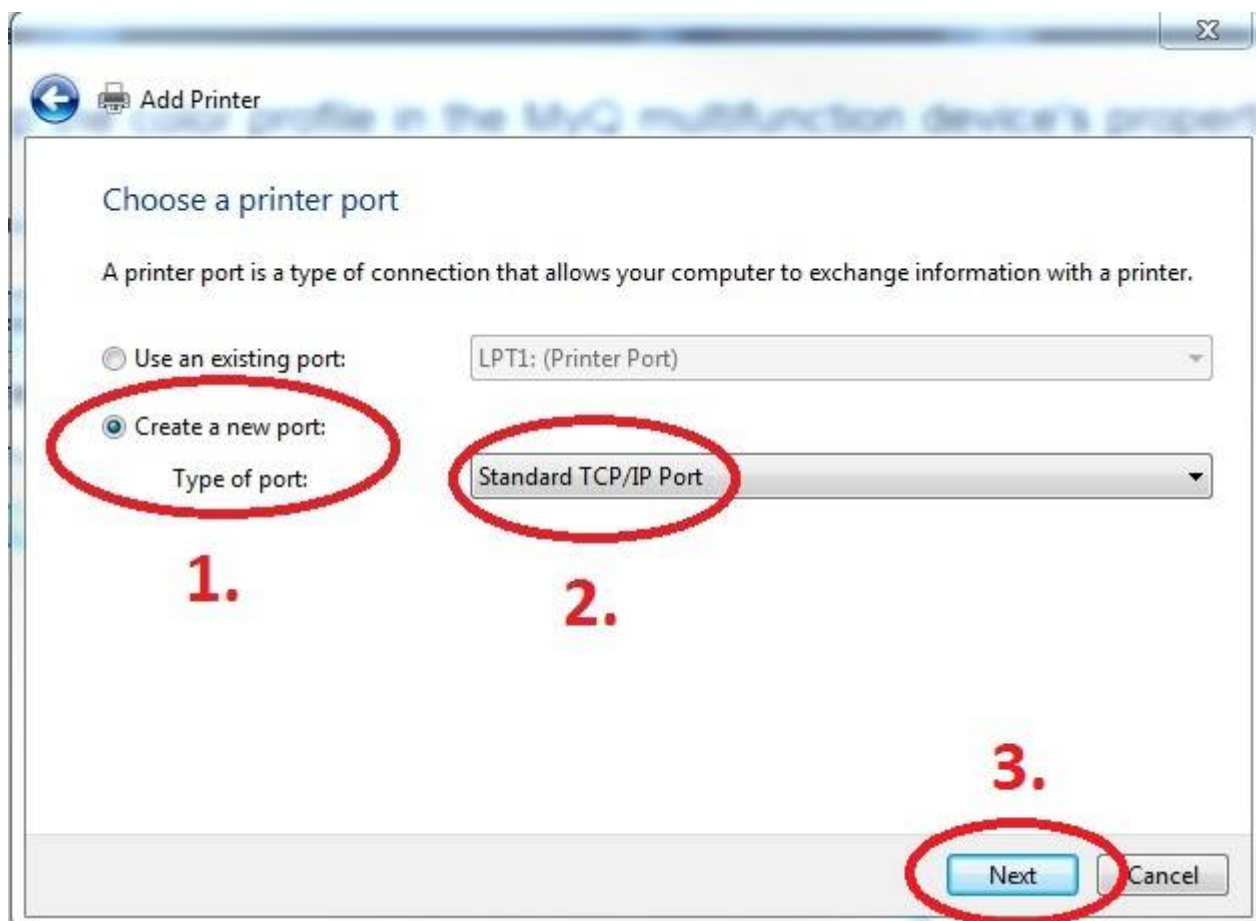

Enter Hostname - myq.cerge-ei.cz

The screenshot shows the 'Add Printer' wizard with the title 'Type a printer hostname or IP address'. The 'Device type' is set to 'TCP/IP Device'. The 'Hostname or IP address' field contains 'myq.cerge-ei.cz' and is circled in red with a red '1.' next to it. The 'Port name' field also contains 'myq.cerge-ei.cz'. The checkbox 'Query the printer and automatically select the driver to use' is checked. At the bottom right, the 'Next' button is circled in red with a red '2.' next to it.

Customize Settings

Important settings (check twice)



- Protocol: **LPR**
- Queue name: **FM**
- [x] **LPR Byte Counting Enabled**

The screenshot shows the 'Add Printer' wizard with the title 'Additional port information required'. It lists four steps: 1. The device is turned on, 2. The network is connected, 3. The device is properly configured, and 4. The address on the previous page is correct. Below this, it says 'If you think the address is not correct, click Back to return to the previous page. Then correct the address and perform another search on the network. If you are sure the address is correct, select the device type below.' The 'Device Type' is set to 'Custom' (circled in red with a red '1.') and the 'Settings...' button is circled in red with a red '2.'. The 'Next' button is circled in red with a red '7.'. To the right, the 'Configure Standard TCP/IP Port Monitor' dialog is open. The 'Port Name' is 'MyQ' and the 'Printer Name or IP Address' is 'MyQ' (circled in red with a red '3.'). The 'Protocol' is 'LPR' (circled in red with a red '4.'). The 'Raw Settings' section has 'Port Number' set to '9100'. The 'LPR Settings' section has 'Queue Name' set to 'FM' (circled in red with a red '4.'). The checkbox 'LPR Byte Counting Enabled' is checked (circled in red with a red '5.'). The 'SNMP Status Enabled' checkbox is unchecked. The 'Community Name' is 'public' and the 'SNMP Device Index' is '1'. The 'OK' button is circled in red with a red '6.'.

Download driver and unzip it to the local folder (for example c:\driver\). Choose 32-bit or 64-bit version depending on your system:

- 32-bit driver


- 64-bit driver

Mac OS:


OS X 10.8 - 10.13

Mac OS X 10.5 and newer**


Press Have Disk... Navigate to the driver folder (for example c:\driver\64-bit\) and select **"OEMSETUP"**.

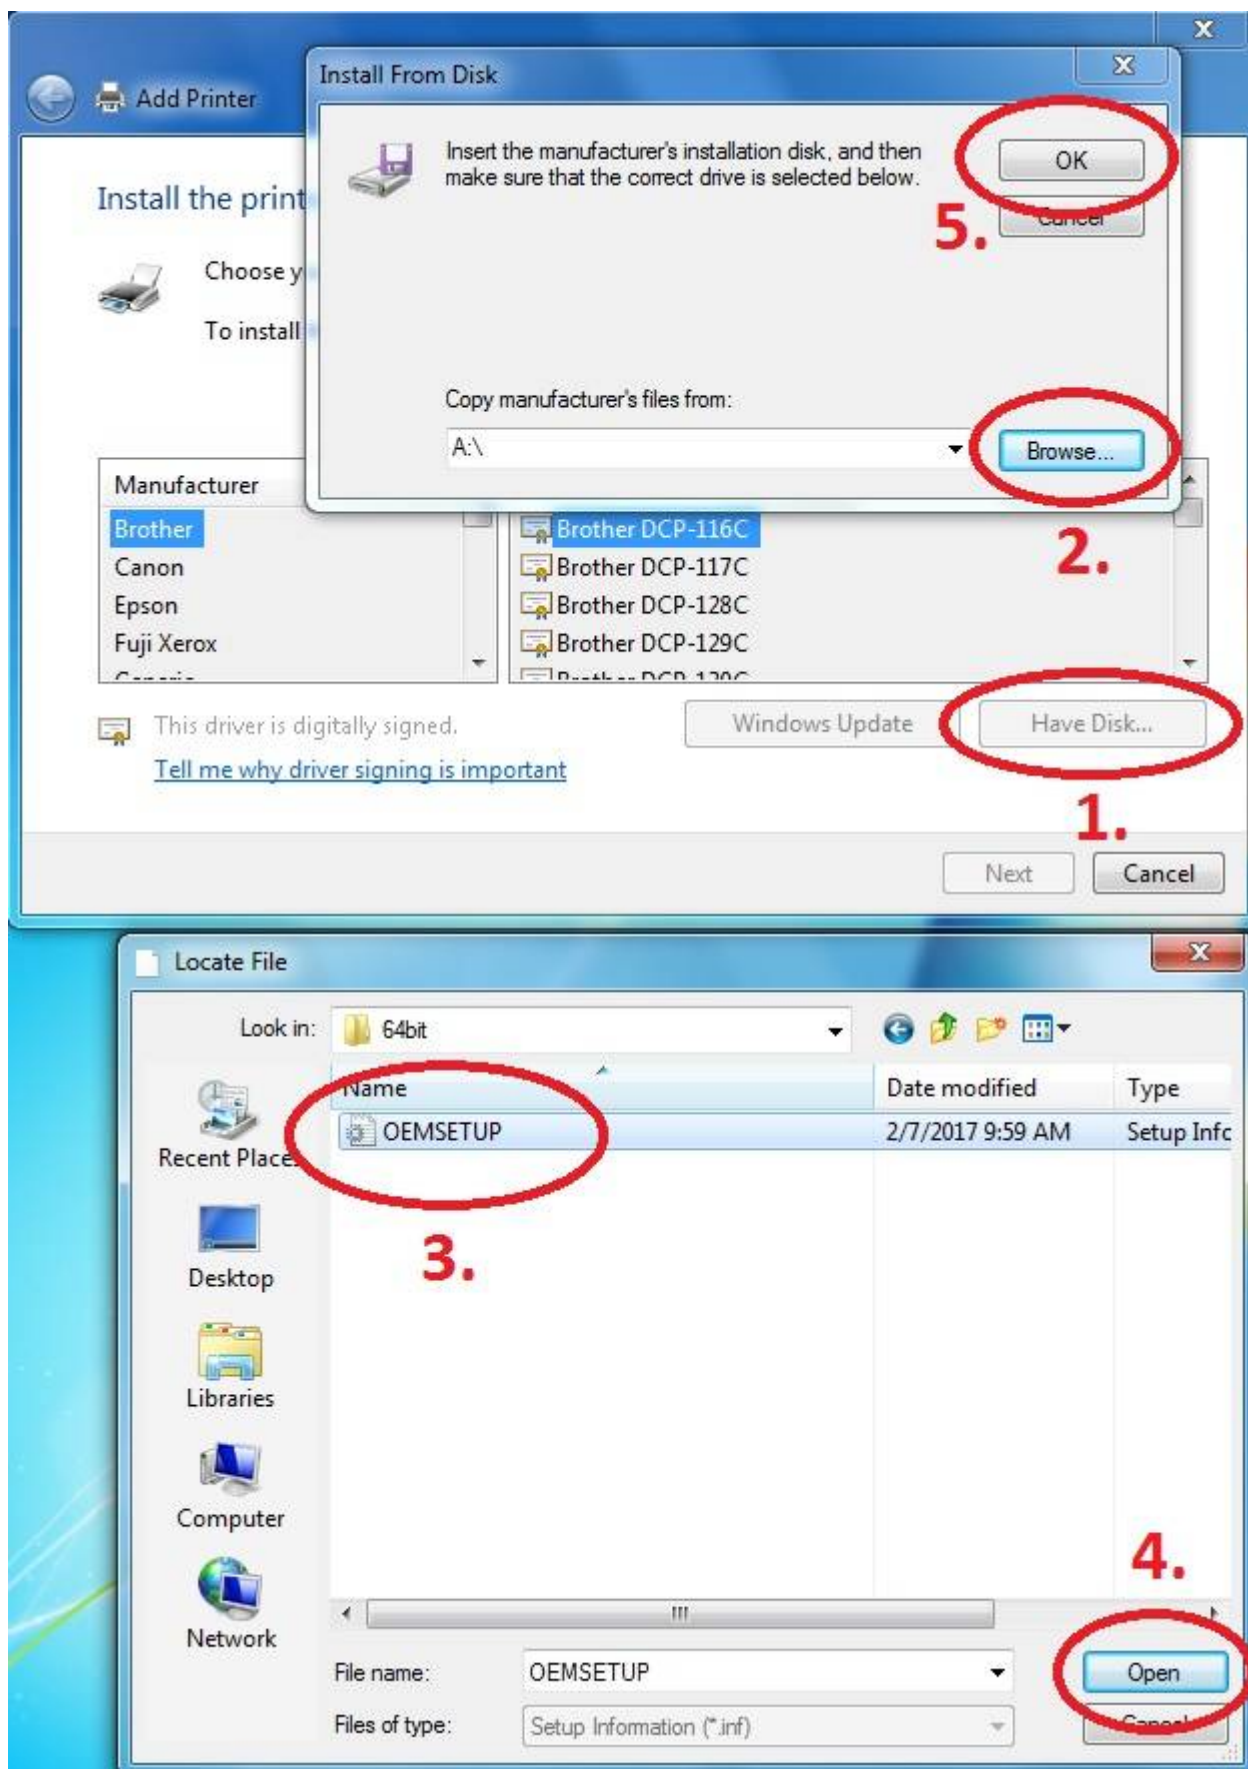

Choose Kyocera TASKalfa 8052ci KX

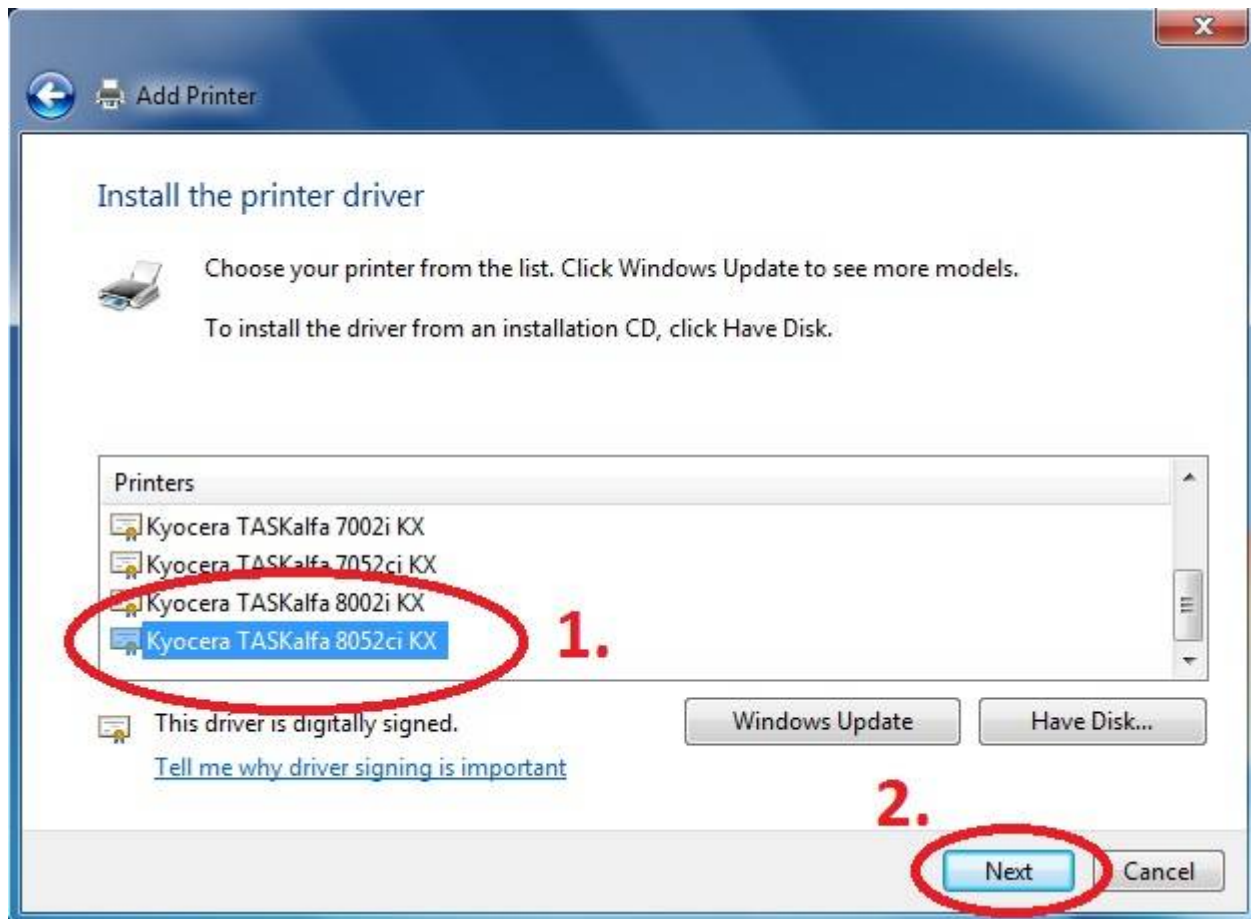

Rename Printer and finish installation.

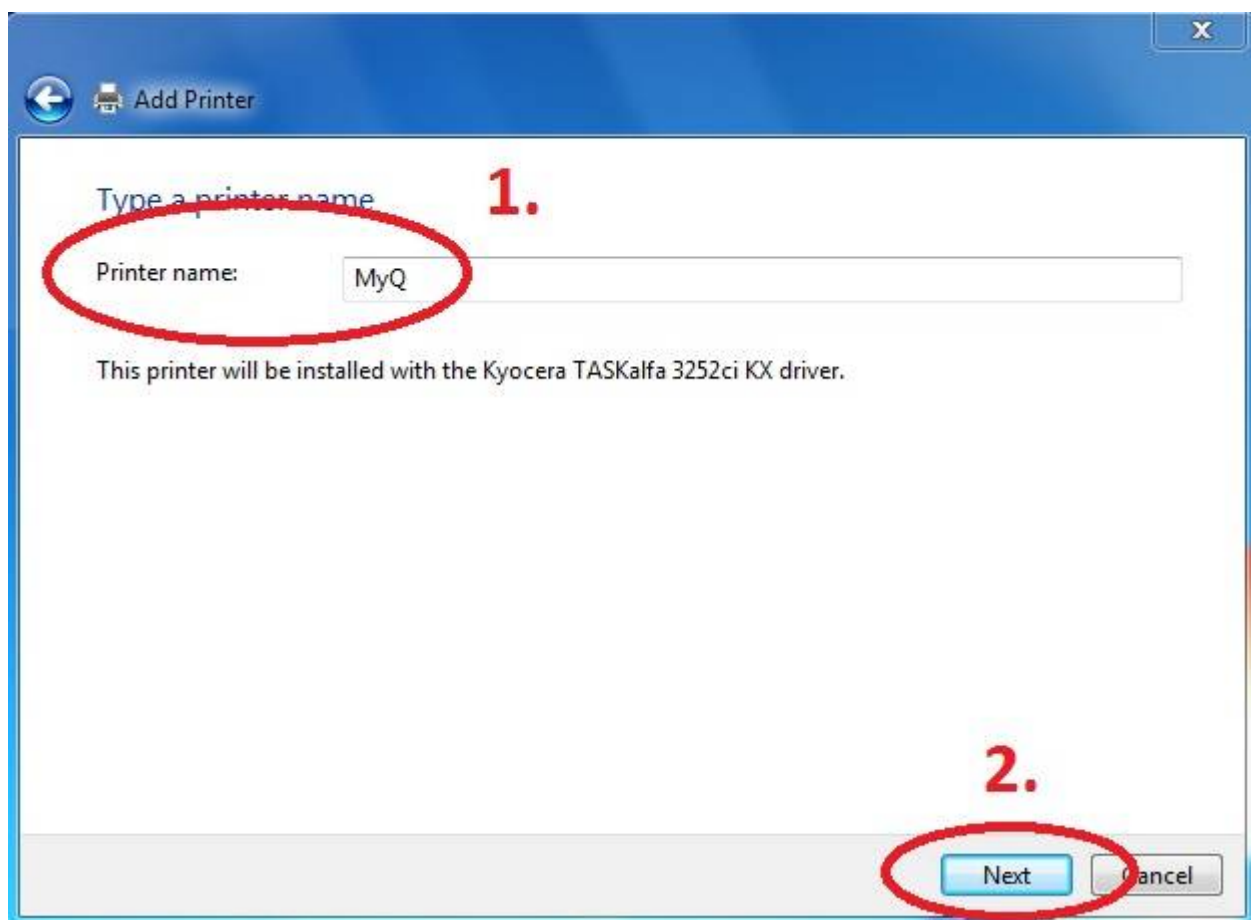



After installing the printer, send your local username on the notebook to

helpdesk@cerge-ei.cz and we will allow printing for your account.

For Advanced settings go to:

https://itinfo.cerge-ei.cz/doku.php?id=public:print:kyocera_profile

From:

<https://wiki.cerge-ei.cz/> - **CERGE-EI Infrastructure Services**

Permanent link:

https://wiki.cerge-ei.cz/doku.php?id=public:print:myq_notebooks&rev=1578915467

Last update: **2020-01-13 11:37**

