



Instructions for adding a Kyocera printer to user stations

Important: notebook must be connected to WiFi residents !!! (libairfree WiFi is not supported)


Press Start button → Devices and Printers → Add a Printer

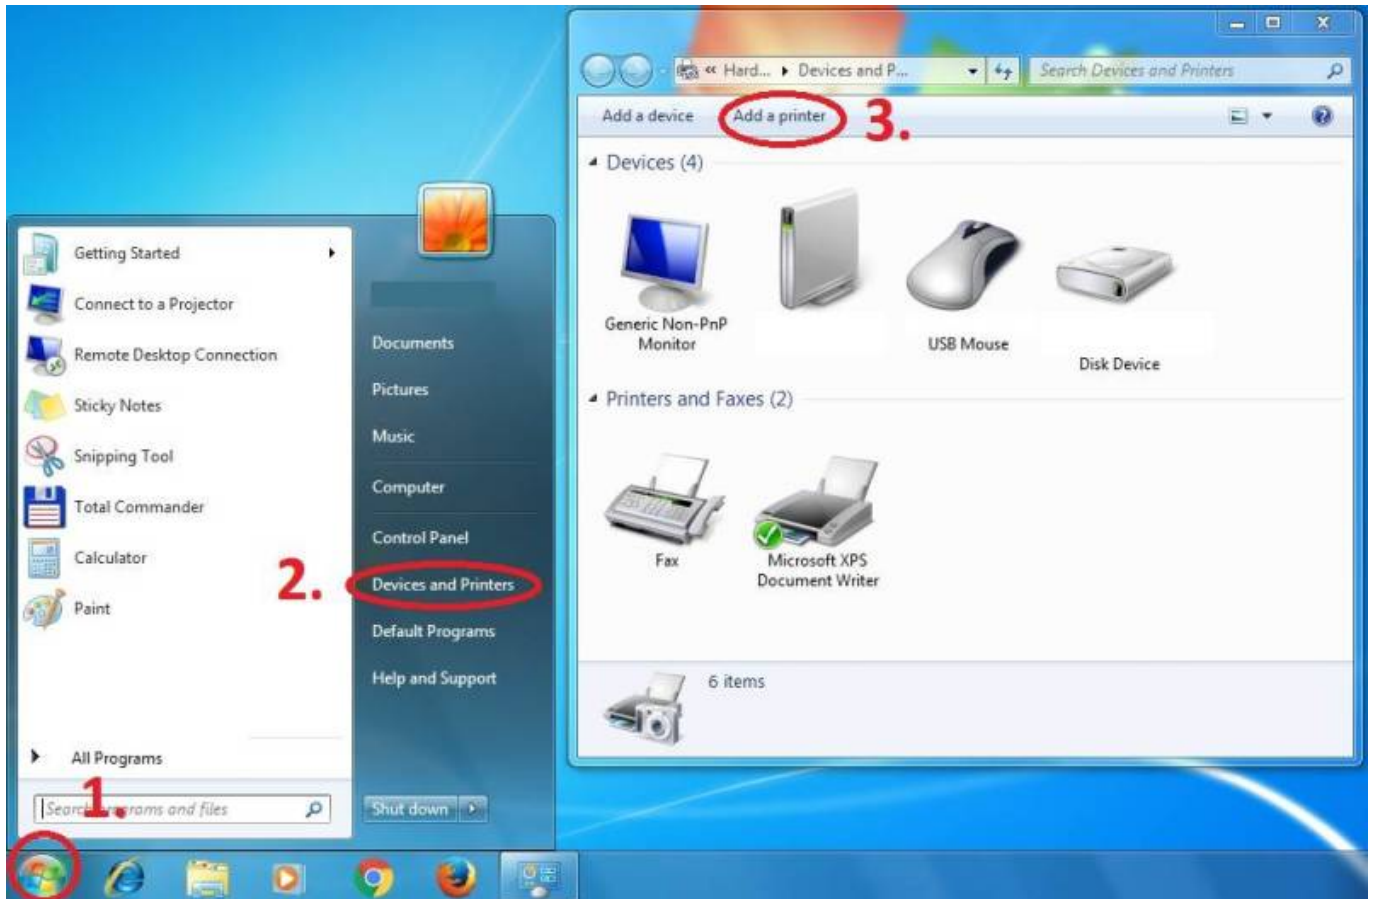


Add a local printer

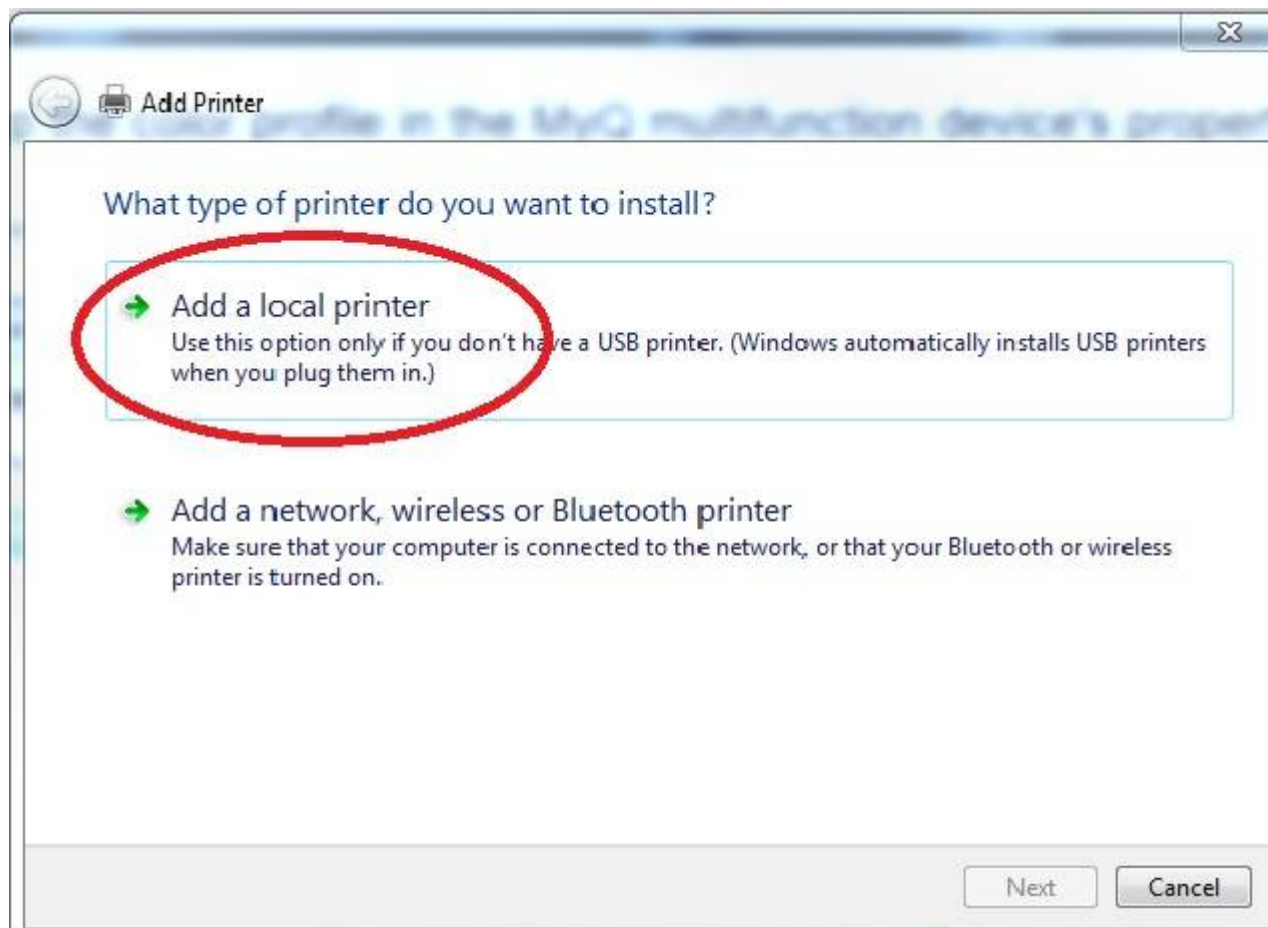

Create a new port: Standard TCP/IP Port

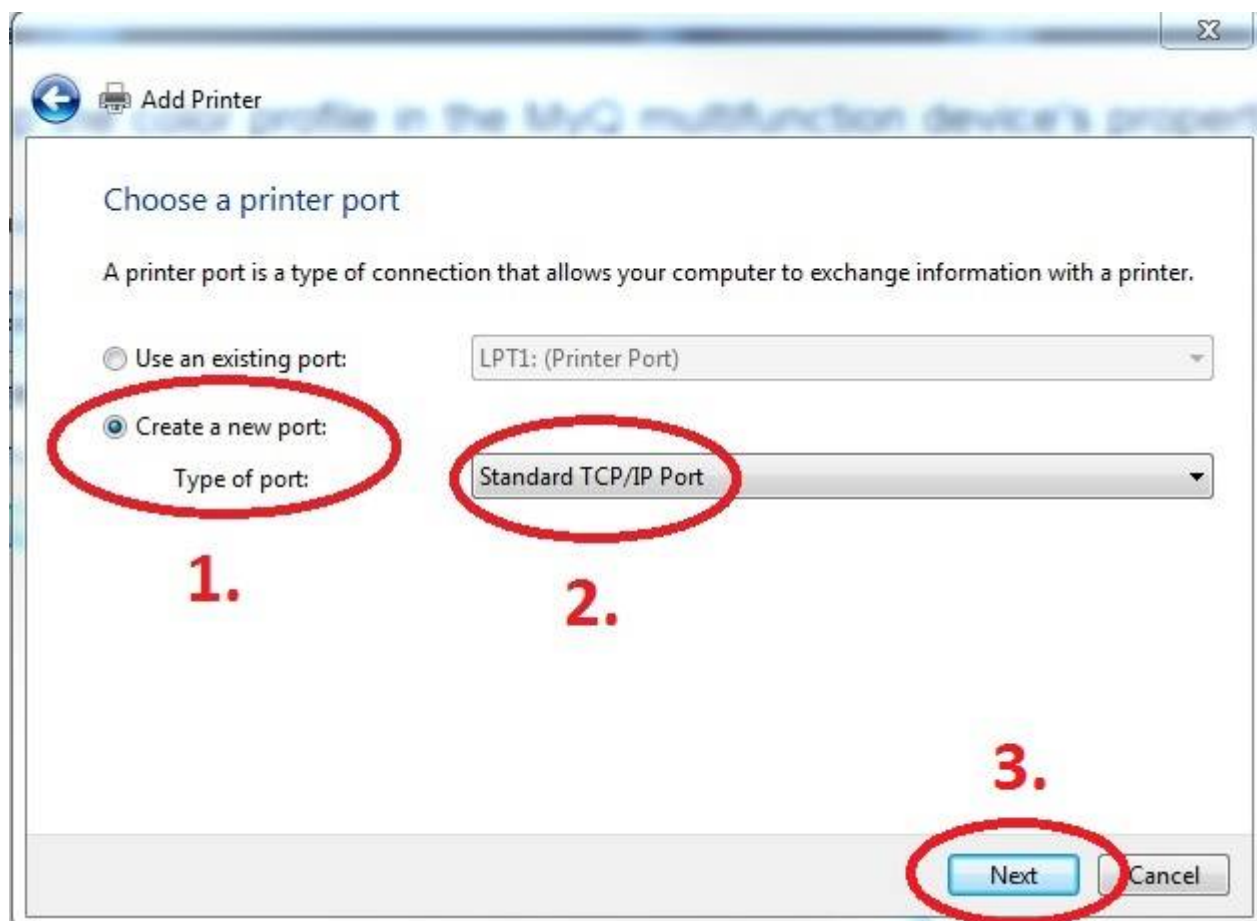

Enter Hostname - myq.cerge-ei.cz

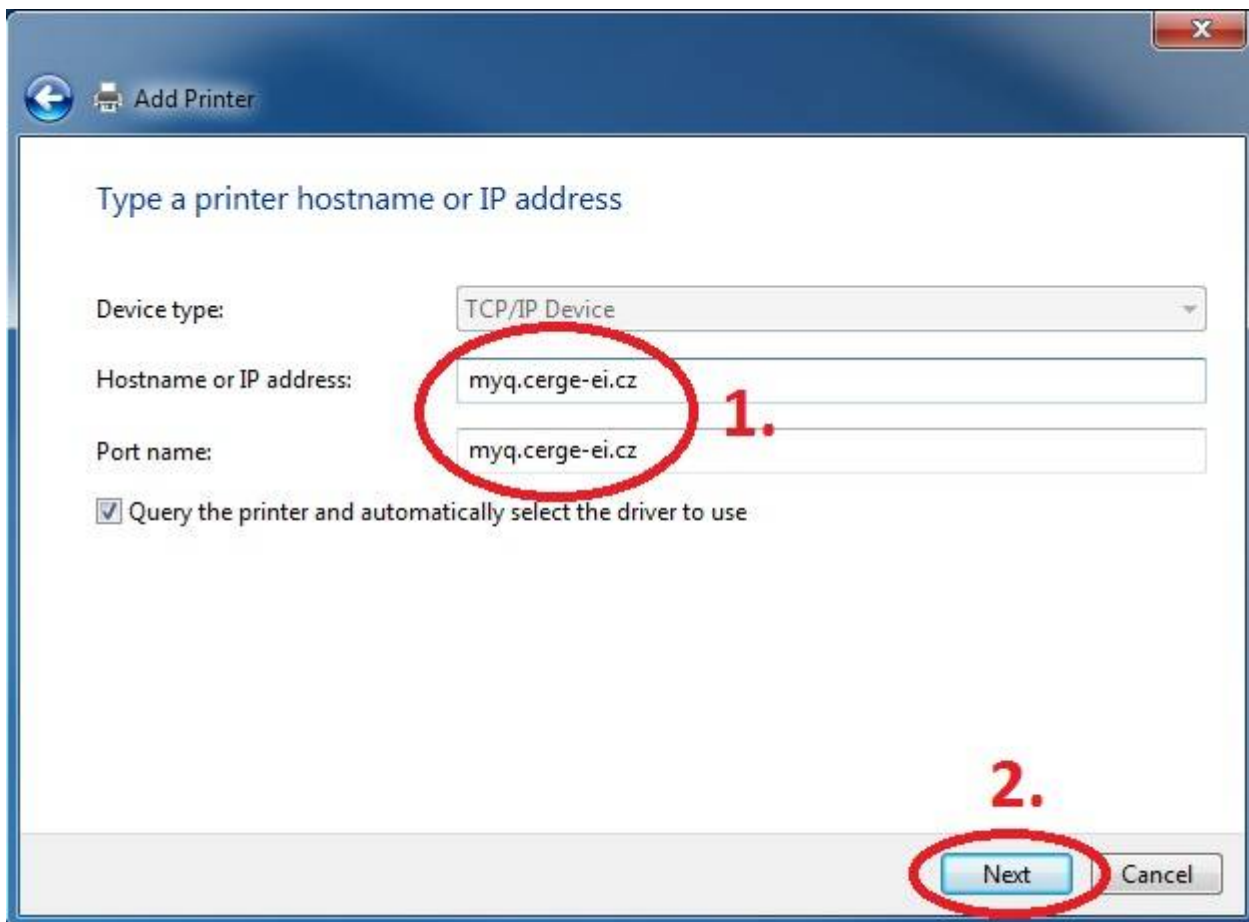


Customize Settings



Important settings (check twice 😊)

- Protocol: **LPR (LPD)**
- Queue name: **FM**
- [x] **LPR Byte Counting Enabled**

Queue link: `lpd:myq.cerge-ei.cz/FM`

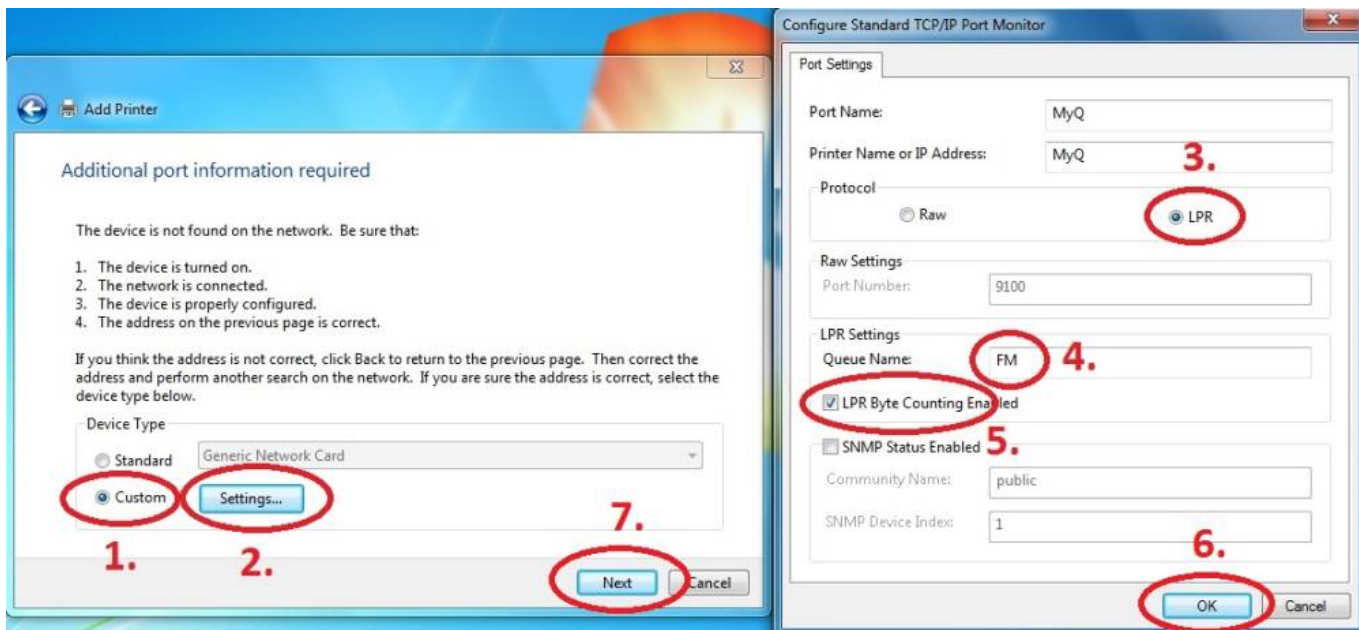


Download driver and unzip it to the local folder (for example c:\driver\).
Choose 32-bit or 64-bit version depending on your system: - 32-bit driver- 64-bit driver
Mac OS: OS X 10.8 - 10.13 Mac OS X 10.5 and newer**
Press Have Disk...
Navigate to the driver folder (for example c:\driver\64-bit\) and select "OEMSETUP".

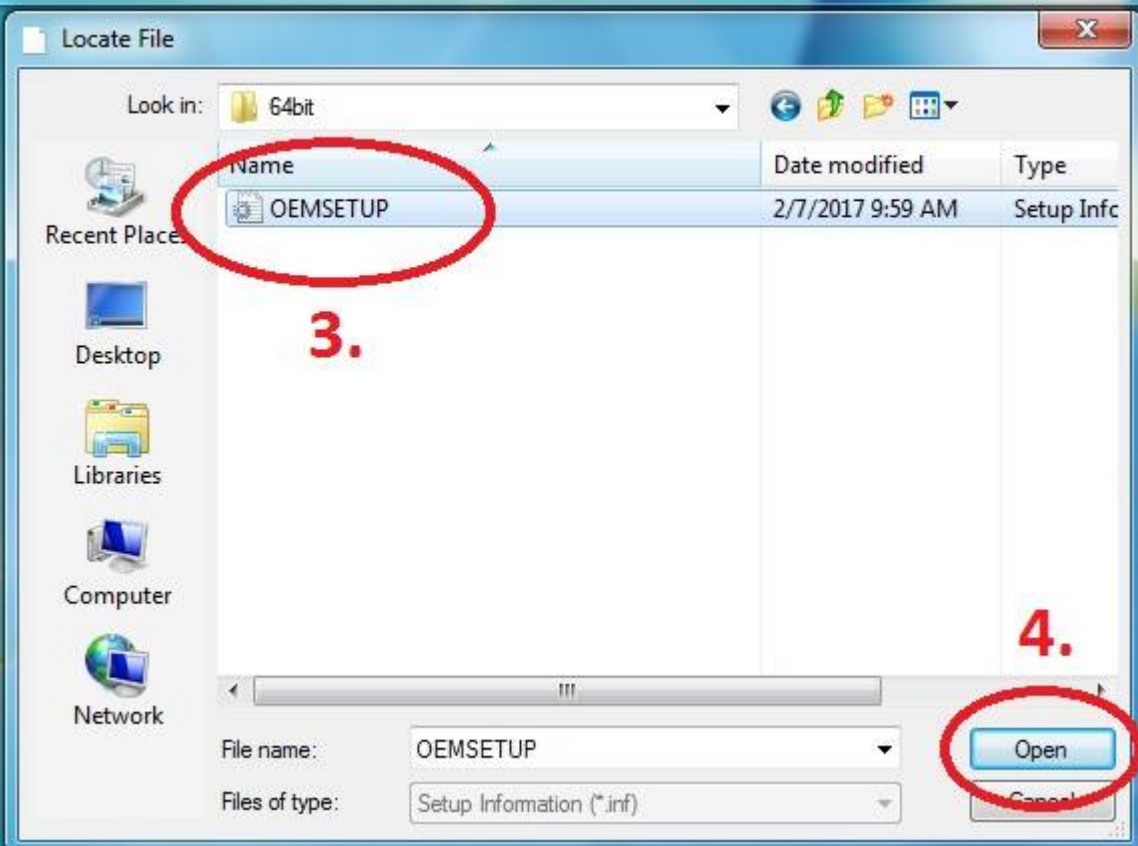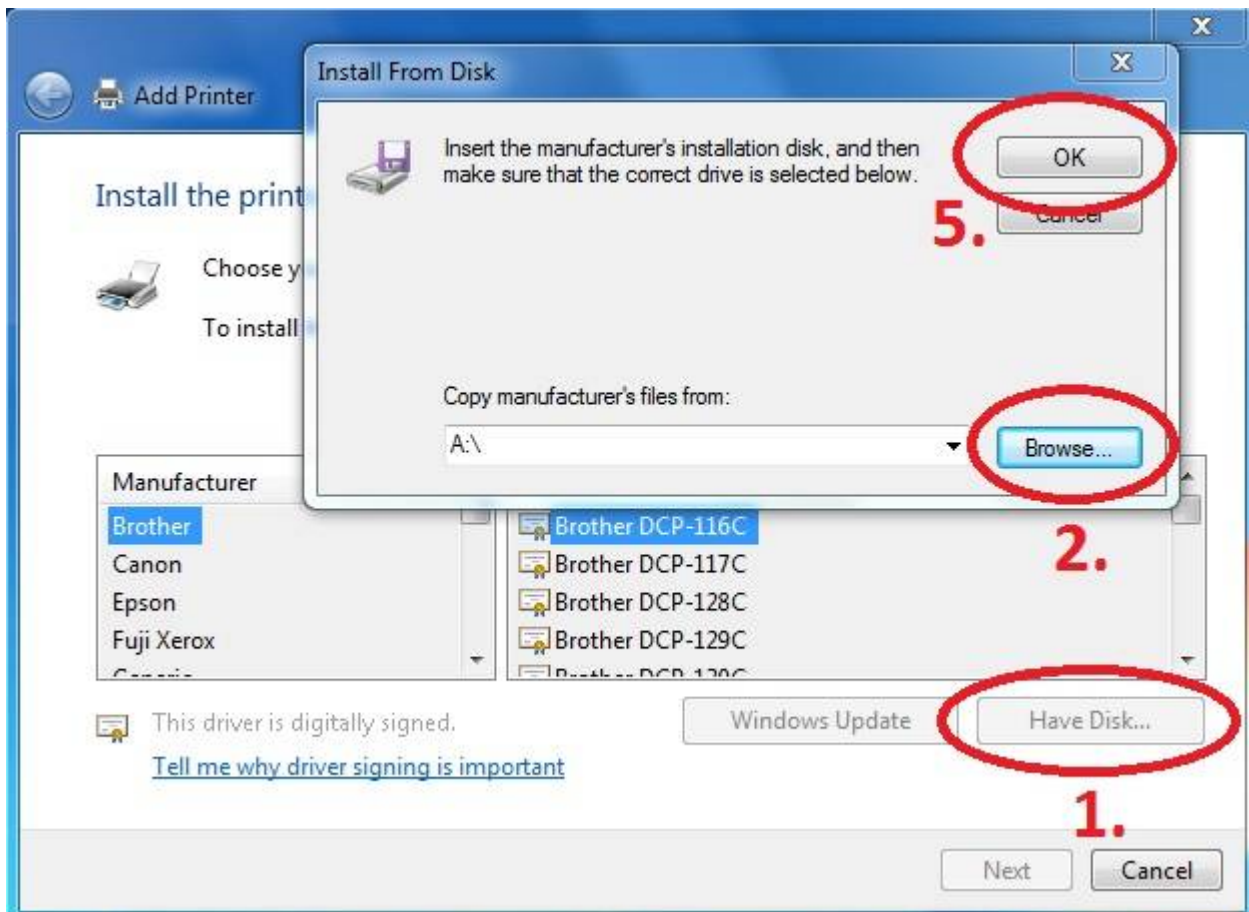


Choose


Kyocera TASKalfa 8052ci KX

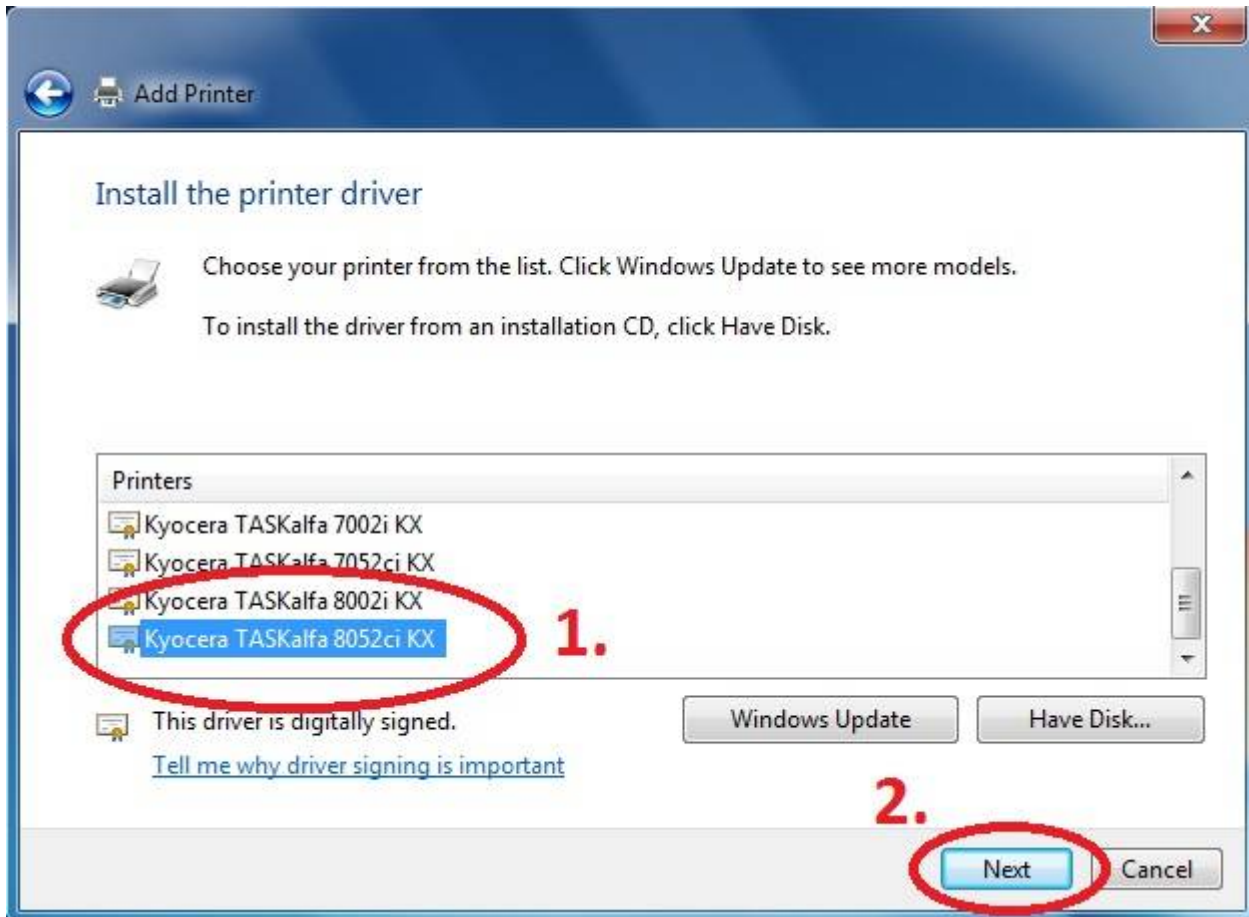

Rename

Printer and finish installation.

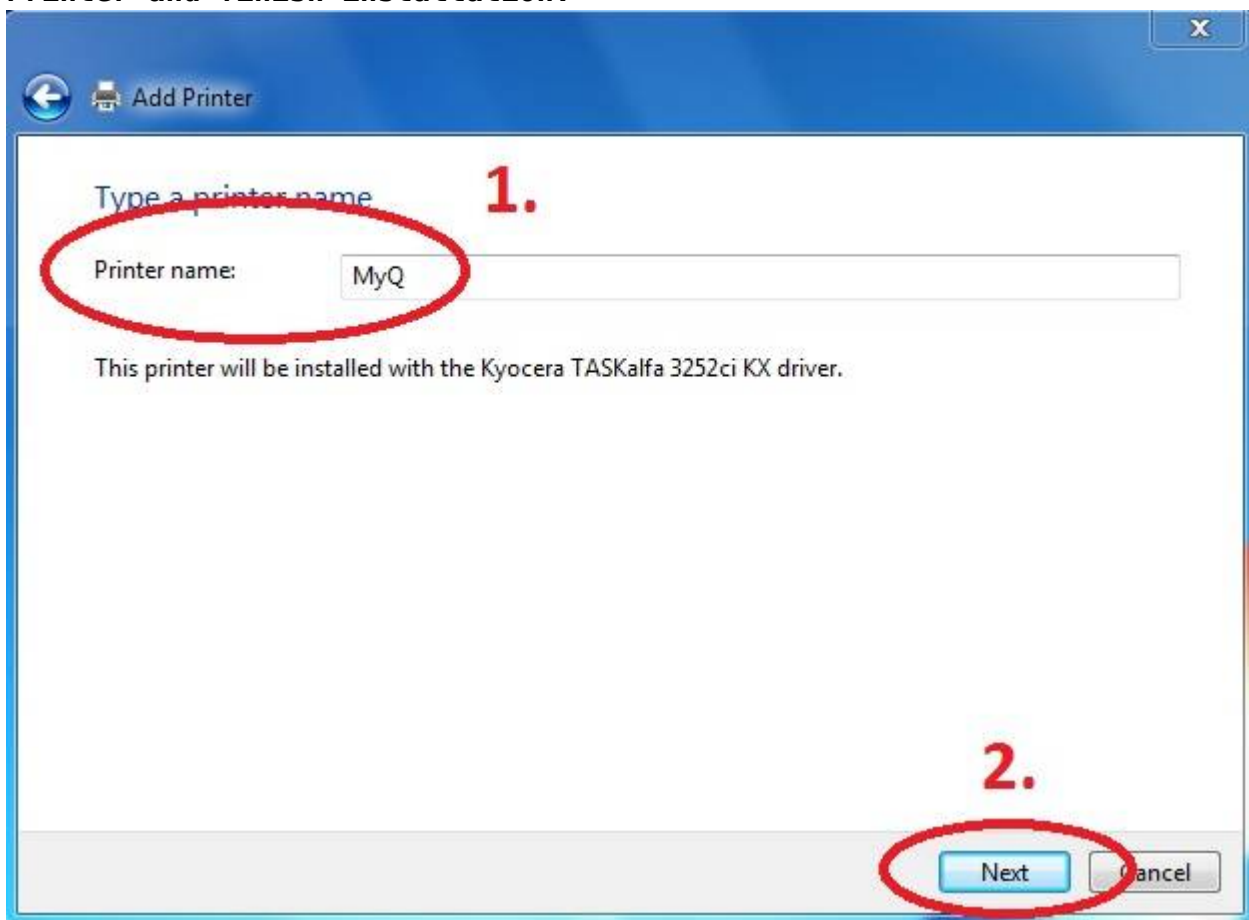

 After installing the printer, send your local username on the notebook to helpdesk@cerge-ei.cz and we will allow printing for your account.

For Advanced settings go to:

https://itinfo.cerge-ei.cz/doku.php?id=public:print:kyocera_profile **11

From:
<https://wiki.cerge-ei.cz/> - **CERGE-EI Infrastructure Services**

Permanent link:
https://wiki.cerge-ei.cz/doku.php?id=public:print:myq_notebooks&rev=1578915346

Last update: **2020-01-13 11:35**

