
# Instructions for adding a Kyocera printer to user stations


Important: notebook must be connected to WiFi residents !!! (libairfree WiFi is not supported)

Press Start button→ Devices and Printers → Add a Printer

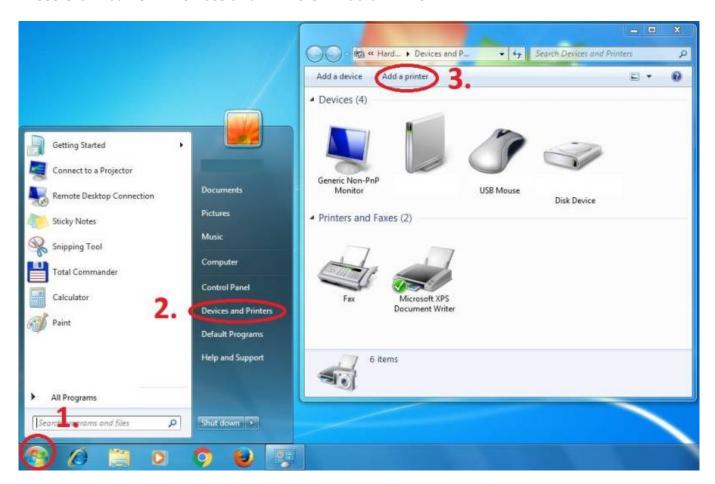


Add a local printer

Last update: 2020-01-13

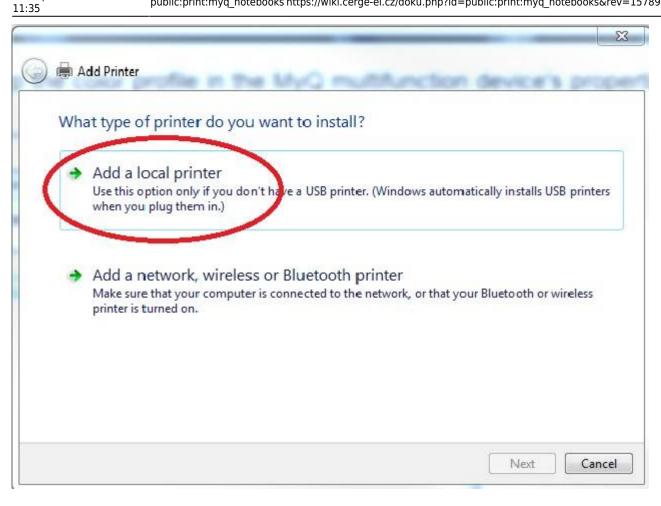


### Create a new port: Standard TCP/IP Port

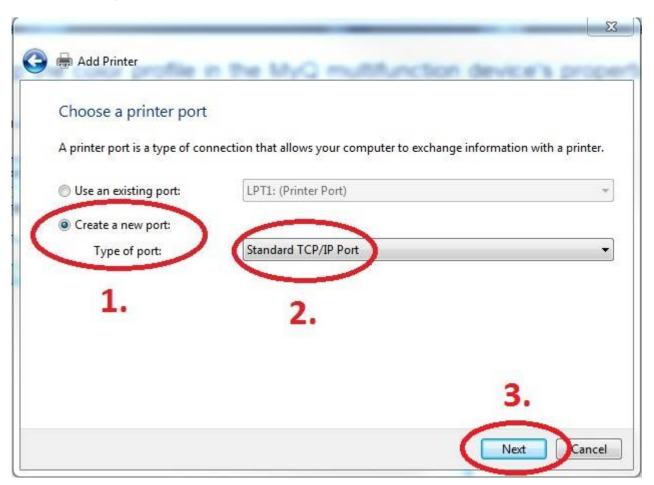

https://wiki.cerge-ei.cz/ Printed on 2025-11-03 22:51

## Enter Hostname - myq.cerge-ei.cz

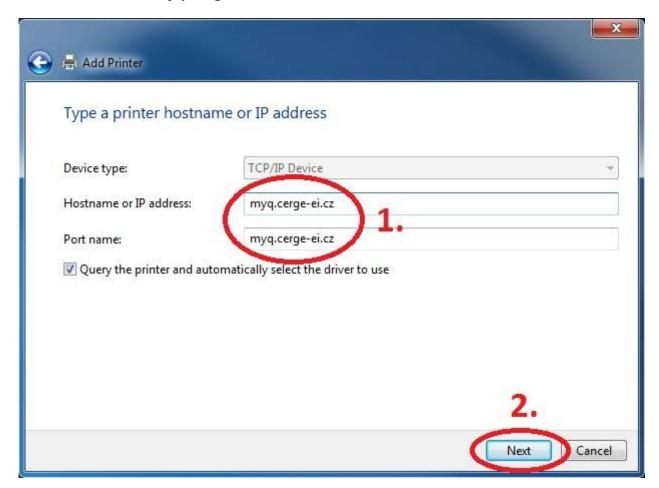

## **Customize Settings**

Important settings (check twice




Protocol: LPR (LPD)Queue name: FM

• [x] LPR Byte Counting Enabled


Queue link: lpd:myq.cerge-ei.cz/FM

Last update: 2020-01-13 11:35

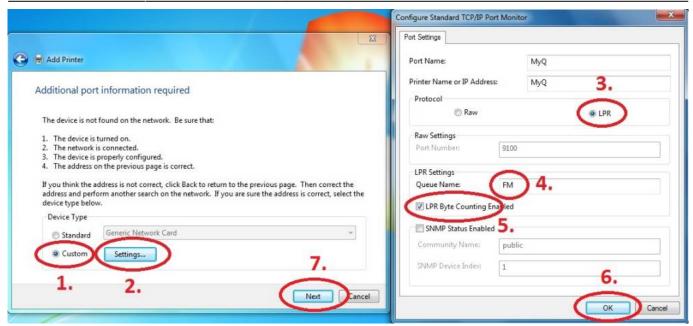


Download driver and unzip it to the local folder (for example c:\driver\). Choose 32-bit or 64-bit version depending on your system:- 32-bit driver- 64-bit driver Mac OS: OS X 10.8 - 10.13Mac OS X 10.5 and newer\*\*Press Have Disk... Navigate to the driver folder (for example c:\driver\64-bit\) and select "OEMSETUP".

https://wiki.cerge-ei.cz/ Printed on 2025-11-03 22:51

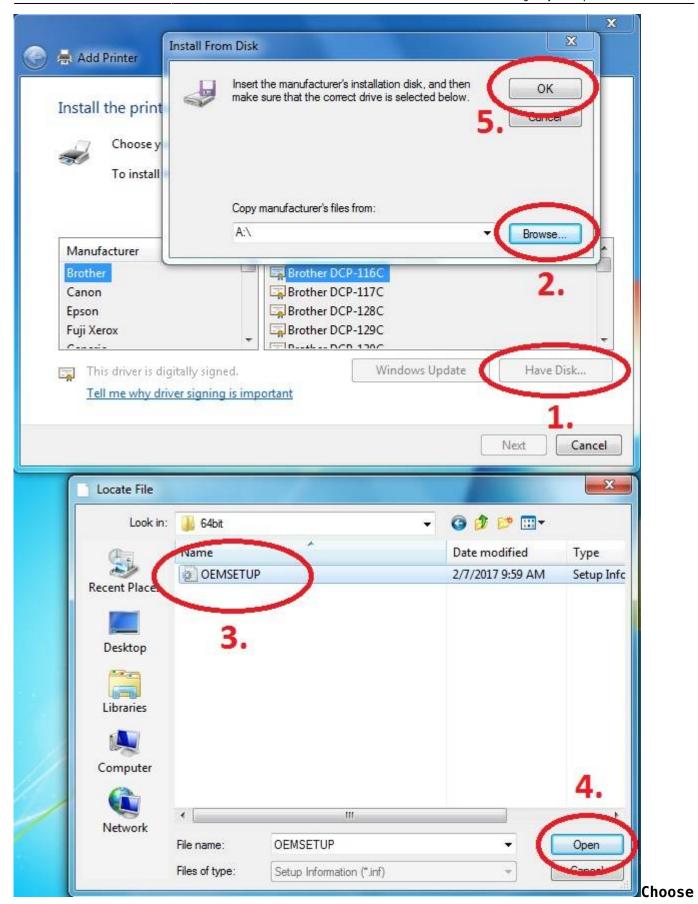


Kyocera TASKalfa 8052ci KX

Last update: 2020-01-13

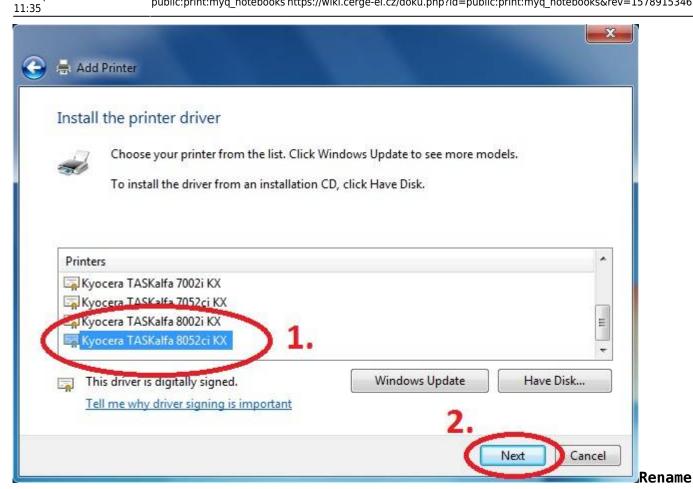

Printer and finish installation.

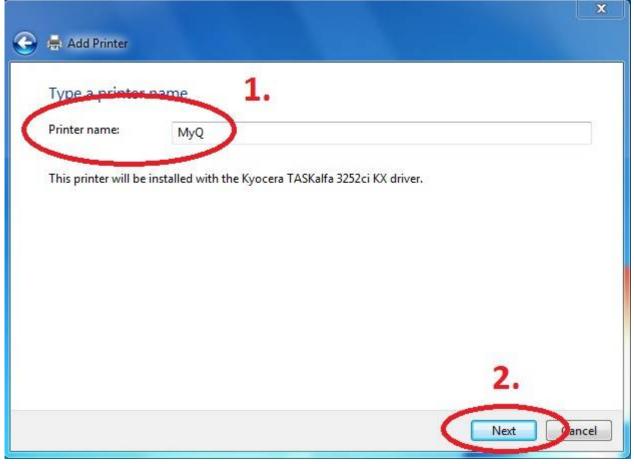



https://wiki.cerge-ei.cz/ Printed on 2025-11-03 22:51



After installing the printer, send your local username on the notebook tohelpdesk@cerge-ei.cz and we will allow printing for your account.

## For Advanced settings go to:

https://itinfo.cerge-ei.cz/doku.php?id=public:print:kyocera\_profile \*\*"

From:

https://wiki.cerge-ei.cz/ - CERGE-EI Infrastructure Services

Permanent link:

https://wiki.cerge-ei.cz/doku.php?id=public:print:myq\_notebooks&rev=1578915346



